

WAAS
CH **97603**
W14A

APP CRS
135°


Rwy Idg
TDZE **327**
Apt Elev **327**

RNAV (GPS) RWY 14
EAST GEORGIA RGNL (SBO)

▼ Baro-VNAV and VDP NA when using Vidalia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Vidalia altimeter setting and increase LPV DA to 708 feet, LNAV/VNAV DA to 698 feet, and all MDA 80 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ SM, LNAV Cats C/D visibility ⅓ SM, and Circling Cats C/D visibility ¼ SM. Rwy 14 helicopter visibility reduction below ¾ SM NA. DME /DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 2500 direct
WINSI and hold.

AWOS-3 133.375	ATLANTA CENTER 127.95 343.75	UNICOM 122.975 (CTAF) 0
--------------------------	--	-----------------------------------

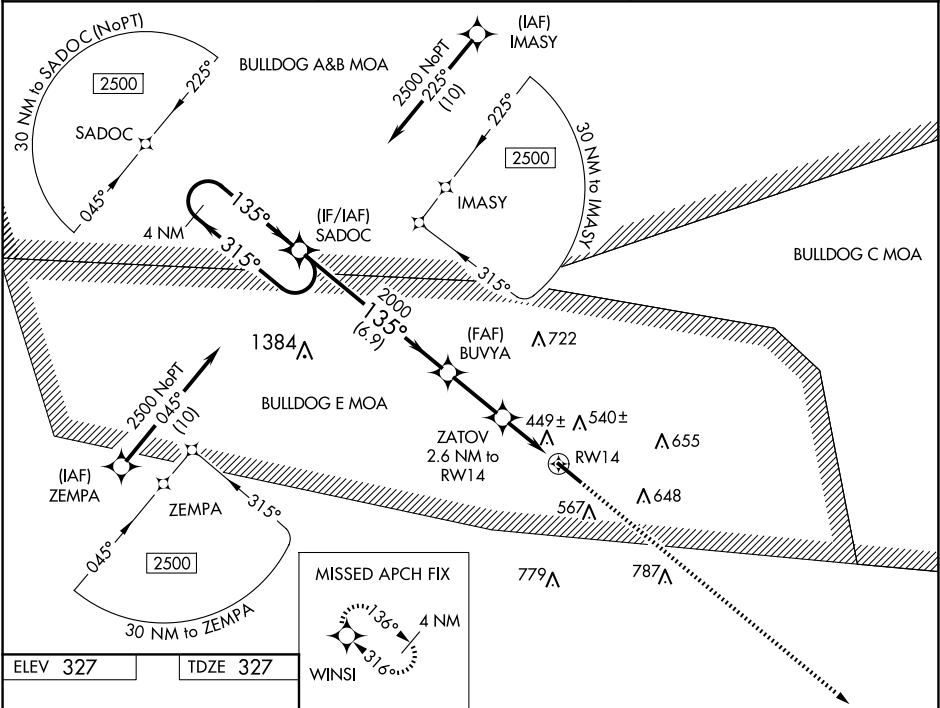

ELEV 327

TDZE 327

4 NM Holding Pattern

SODOC

2500

WINSI

135°

315°

135°

GP 3.00° TCH 42

2000

*1180

6.9 NM

2.5 NM

1.6 NM

1 NM

2500

WINSI

*LNAV only

*1 NM to RW14

RW14

CATEGORY	A	B	C	D
LPV DA		643-1	316 (400-1)	
LNAV/VNAV DA		633-1	306 (400-1)	
LNAV MDA		700-1	373 (400-1)	
CIRCLING	900-1 573 (600-1)	920-1 593 (600-1)	1000-2 673 (700-2)	1000-2¼ 673 (700-2¼)

HIRL Rwy 14-32 0