

APP CRS
047°

Rwy Ldg
TDZE
Apt Elev
5000
8
8

RNAV (RNP) Z RWY 5
NAPLES MUNI (APF')


RNP AR APCH - GPS. Authorization required. From ISAJY or TIOFF: RF.

▼

For uncompensated Baro-VNAV systems, procedure NA below 6°C or above 50°C.

MISSED APPROACH: Climb to 500 then climbing right turn to 2100 direct EVRGD and hold.

ATIS 134.225	FORT MYERS APP CON★ 119.75 371.85 (W) 124.125 371.85 (E)	NAPLES TOWER★ 128.5 (CTAF) 0	GND CON 121.6
------------------------	--	--	-------------------------

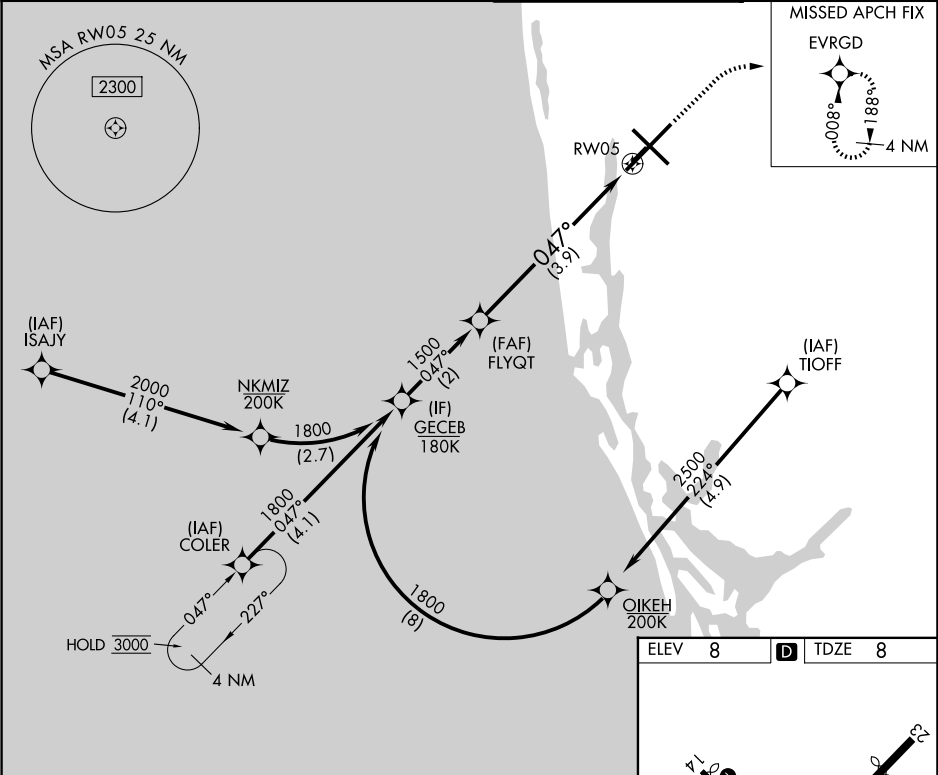

VGSi and RNAV glidepath not coincident (VGSi Angle 3.50/TCH 31).

500

2100

EVRGD

GECEB

1800

047°

1500

FLYQT

1500

RW05

GP 3.50° TCH 40

2 NM

3.9 NM

CATEGORY	A	B	C	D
RNP 0.15 DA		312-1	304 (400-1)	
RNP 0.30 DA		396-1½	388 (400-1½)	

AUTHORIZATION REQUIRED

ELEV 8

TDZE 8

500 X 100

600 X 150

500 X 100

047°

TWR

REIL Rwy 5, 14, 23 and 32 0
MIRL Rwy 5-23 and 14-32 0