

WAAS
CH **99518**
W17A

APP CRS
175°

Rwy Idg
TDZE **699**
Apt Elev **699**

RNAV (GPS) RWY 17

DURANT RGNL/EAKER FLD (DUA)



RNP APCH.

Inop table does not apply to LPV and LNAV Cat C. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV Cat A/B visibility to 1 ¼ SM.

ODALS

MISSED APPROACH: Climb to 2500 direct ZEGRA and hold.

AWOS-3 124.175	FORT WORTH CENTER 124.75 323.0	UNICOM 123.05 (CTAF) 0
--------------------------	--	----------------------------------

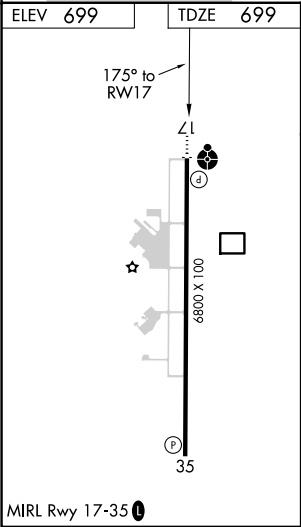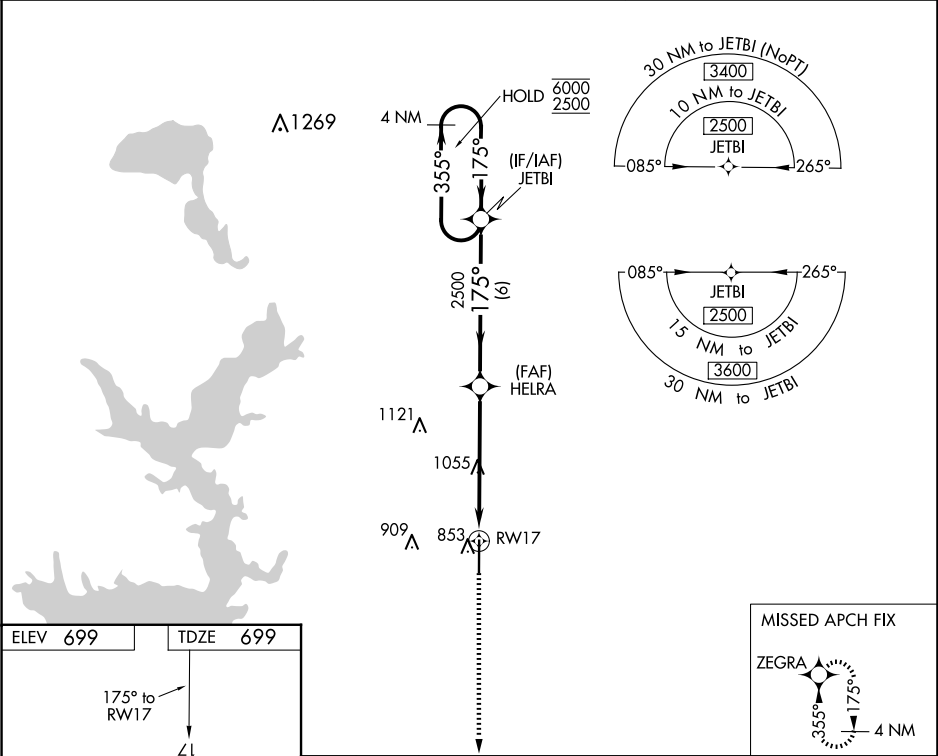

2500 ZEGRA

*LNAV only.

HELRA 2500

JETBI 4 NM Holding Pattern

*1.8 NM to RWY 17

175° 355° 175°

6000 2500

GP 3.00° TCH 43

CATEGORY	A	B	C	D
LPV DA	899-3/4	200 (200-3/4)		NA
LNAV/VNAV DA	1133-11/8	434 (500-11/8)		NA
LNAV MDA	1320-3/4 621 (700-3/4)	1320-13/4 621 (700-13/4)		NA