

LOC/DME I-HZR	APP CRS	Rwy Idg	5003
111.9	004°	TDZE	36
Chan 56		Apt Elev	39

LOC RWY 36

FALSE RIVER RGNL (HZR)

NA


When local altimeter setting not received, use Baton Rouge altimeter setting and increase all MDA 60 feet; increase S-36 Cat C/D visibility to 1½ SM and Circling Cat C to 1¼ SM.

ODALS

MISSED APPROACH:

Climb to 700 then climbing right turn to 2000 direct LSU VORTAC and hold.

AWOS-3PT 121.250	BATON ROUGE APP CON★ 120.3 278.3	UNICOM 122.8 (CTAF) 0
---------------------	-------------------------------------	--------------------------

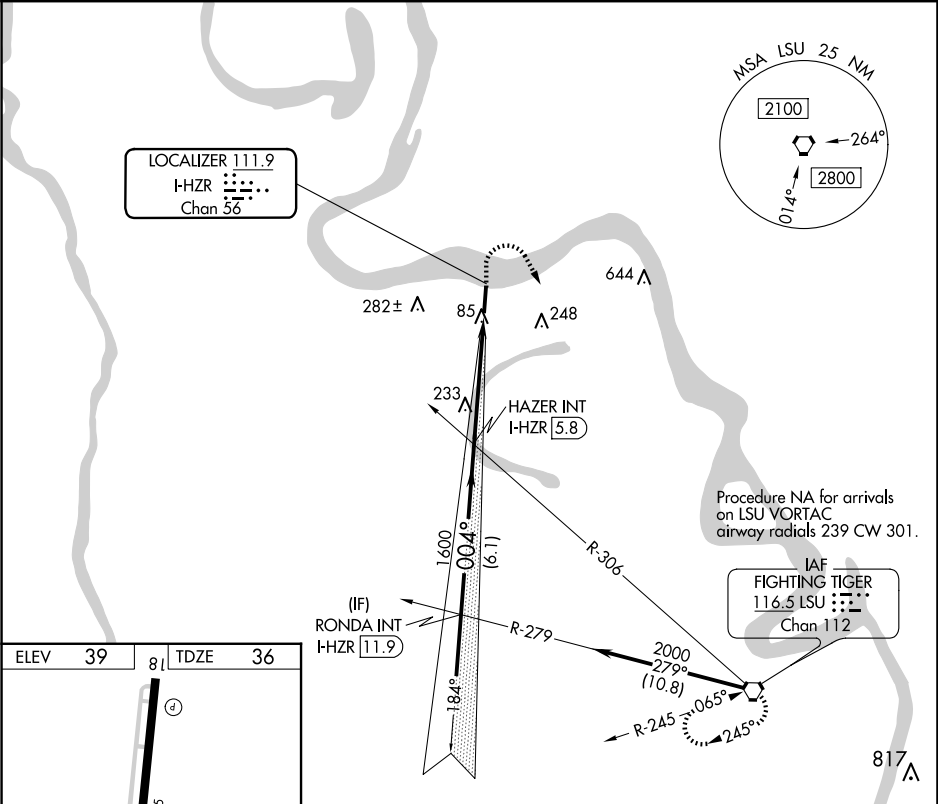

ELEV	39	81	TDZE	36
------	----	----	------	----

5003 X 75

004° 4.8 NM from FAF

36

MIRL Rwy 18-36

REIL Rwy 18

FAF to MAP 4.8 NM					
Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

	RONDA INT I-HZR 11.9	HAZER INT I-HZR 5.8	I-HZR 2.3	
	2000	1600		
	004°	3.00°		
	6.1 NM	3.5 NM	1.3	
		TCH 50		

CATEGORY	A	B	C	D
S-36	500-¾ 464 (500-¾)		500-1¼ 464 (500-1¼)	
CIRCLING	500-1 461 (500-1)	520-1 481 (500-1)	600-1½ 561 (600-1½)	600-2 561 (600-2)

SC-4, 27 NOV 2025 to 25 DEC 2025

SC-4, 27 NOV 2025 to 25 DEC 2025