


WAAS CH 65999 W05A	APP CRS 053°	Rwy Ldg TDZE 700 Apt Elev 700
--	------------------------	---


RNAV (GPS) RWY 5
BESSEMER NTL (EKY)

NA Baro-VNAV NA when using Alabaster altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Alabaster altimeter setting and increase LPV DA to 941 feet, LNAV/VNAV DA to 1285 feet, and all MDAs 60 feet; increase Circling Cat D visibility ¼ SM.	MISSED APPROACH: Climb to 4000 direct IKIMY and on track 108° to HANDE and hold.
--	--

AWOS-3PT 118.825	BIRMINGHAM APP CON 124.9 351.85	CLNC DEL 123.75	UNICOM 123.0 (CTAF)
----------------------------	---	---------------------------	-------------------------------

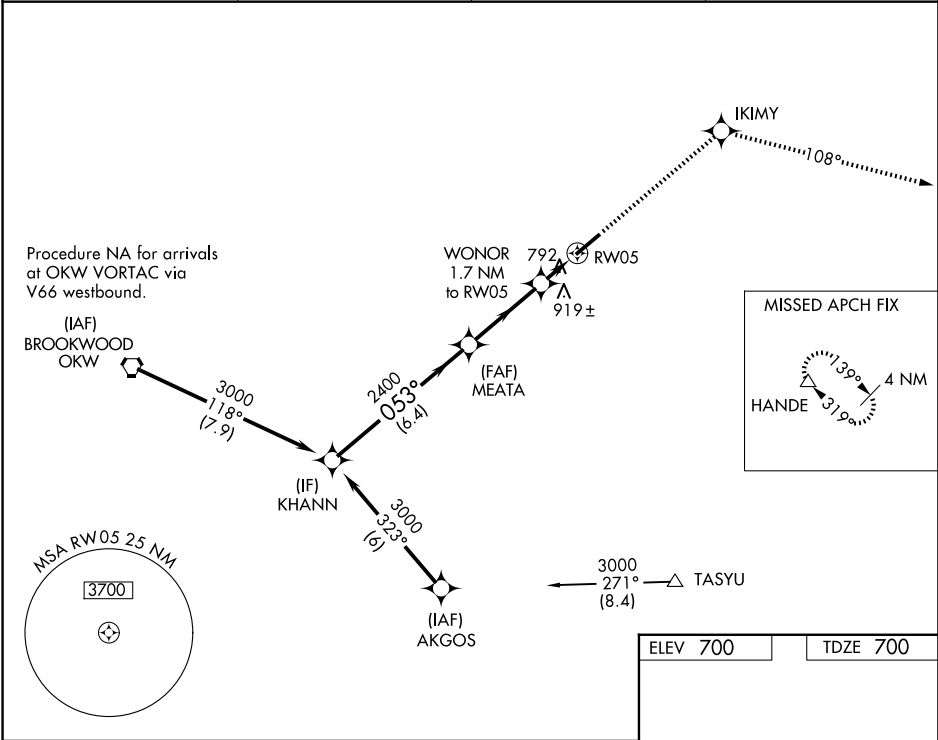

Procedure Turn NA	KHANN	MEATA	4000 IKIMY	tr 108°	HANDE
3000	053°	2400	WONOR 1.7 NM to RW05		
GP 3.00° TCH 60		*1300	RW05		* LNAV only
	6.4 NM	3.4 NM	1.7 NM		
CATEGORY	A	B	C	D	
LPV DA		900-¾	200 (200-¾)		
LNAV/VNAV DA		1244-2	544 (600-2)		
LNAV MDA	1160-1	460 (500-1)	1160-1⅜ 460 (500-1⅜)	1160-1½ 460 (500-1½)	
CIRCLING	1200-1	500 (500-1)	1220-1½ 520 (600-1½)	1320-2 620 (700-2)	

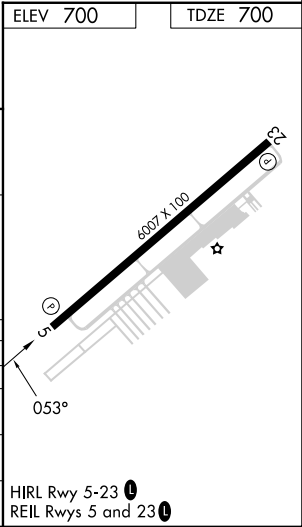

SE-4, 27 NOV 2025 to 25 DEC 2025

SE-4, 27 NOV 2025 to 25 DEC 2025