


WAAS CH 97308 W27A	APP CRS 273°	Rwy Idg TDZE 1011 Apt Elev 1040
--	------------------------	---

RNAV (GPS) RWY 27

COBB COUNTY INTL/MCCOLLUM FLD (RYY)

RNP APCH-GPS.				MALSF		MISSED APPROACH: Climb to 3500 direct UPHAH and hold.	
Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cats C and D visibility to 1 3⁄8 SM.							
ATIS 128.125	ATLANTA APP CON 121.0 268.7	MCCOLLUM TOWER ★ 125.9 (CTAF) 0	GND CON 119.0	CLNC DEL 119.0	CLNC DEL 121.0 268.7 (When twr closed)		UNICOM 122.7

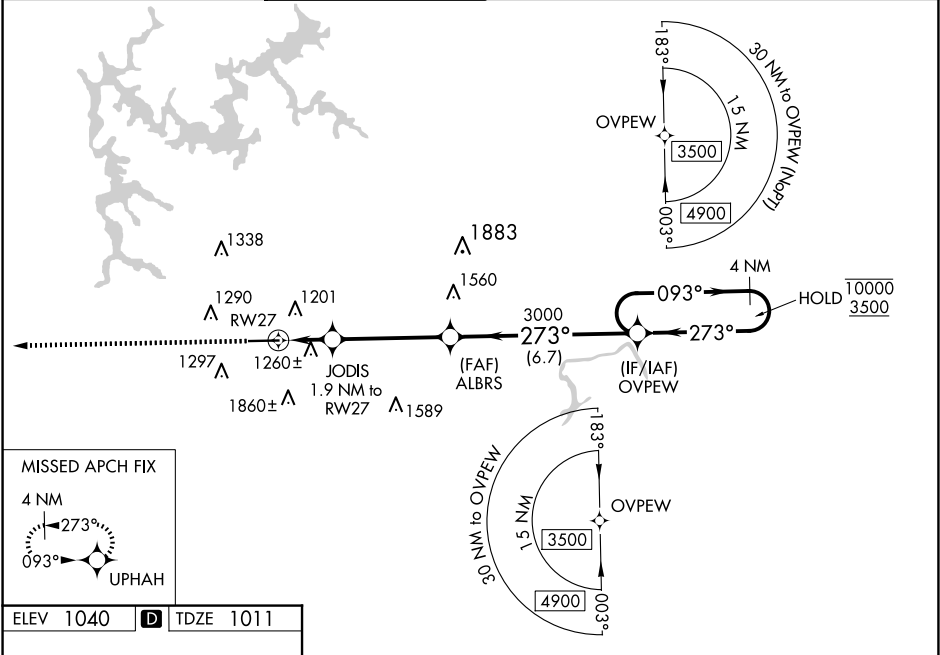

ELEV 1040	D	TDZE 1011
TWR 1168 6295 X 100 0.7% UP 27°		
HIRL Rwy 9-27 0		

3500		UPHAH	
RW27		ALBRS	
JODIS 1.9 NM to RW27		3000	
1660		3000	
1.9 NM		4.2 NM	
6.7 NM		30 NM to OVPEW	
CATEGORY	A	B	C
LPV DA	1211-3⁄4	200 (200-3⁄4)	
LNAV/VNAV DA	1520-1 1⁄4	509 (500-1 1⁄4)	
LNAV MDA	1520-3⁄4	509 (500-3⁄4)	1520-1 1⁄4 509 (500-1 1⁄4)
C CIRCLING	1800-1	760 (800-1)	2180-3 1140 (1200-3)