


WAAS CH 70443 W15A	APP CRS 148°	Rwy Idg TDZE 3943 Apt Elev 3947
--	------------------------	---

RNAV (GPS) RWY 15

CHOTEAU (CII)

RNP APCH.	
▼ ▲NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22° C or above 54° C.	MISSED APPROACH: Climb to 6200 direct CALAD and hold.

AWOS-2 119.275	SALT LAKE CITY CENTER 133.4 285.4	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

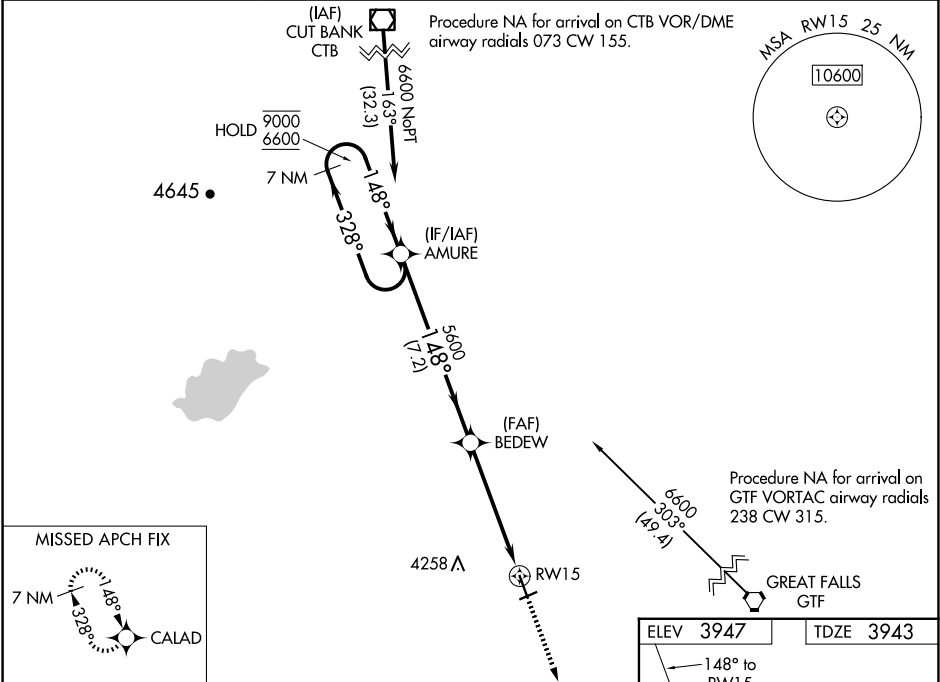

7 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 24).		6200	CALAD
9000	6600	328°	148°	5600	*1.4 NM to RW15
GP 3.00°		TCH 45		*LNAV only	
7.2 NM		3.7 NM		1.4 NM	
CATEGORY	A	B	C	D	
LPV DA	4143-1 200 (200-1)				
LNAV/VNAV DA	4193-1 250 (300-1)				
LNAV MDA	4420-1 477 (500-1)		4420-1¾ 477 (500-1¾)		
CIRCLING	4440-1 493 (500-1)		4600-1¾ 653 (700-1¾)		4900-3 953 (1000-3)

