| WAAS CH 56440 W06A | APP CRS 058° | Rwy ldg 3396<br>TDZE 574<br>Apt Elev 575 |
|---|---|---|

# RNAV (GPS) RWY 6
## PAGELAND (PYG)

T A NA Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Charlotte/Monroe Exec altimeter setting. When Charlotte/Monroe Exec altimeter not received, use Charlotte/Douglas Intl altimeter setting and increase LPV DA to 943 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 1139 feet and all visibilities ¼ SM. Increase all MDA 60 feet.

MISSED APPROACH: Climb to 2400 direct WOVEX and hold.

| EQY ASOS | CHARLOTTE APP CON | (CTAF) |
|---|---|---|
| 135.775 | 120.05 307.8 | 122.9 |

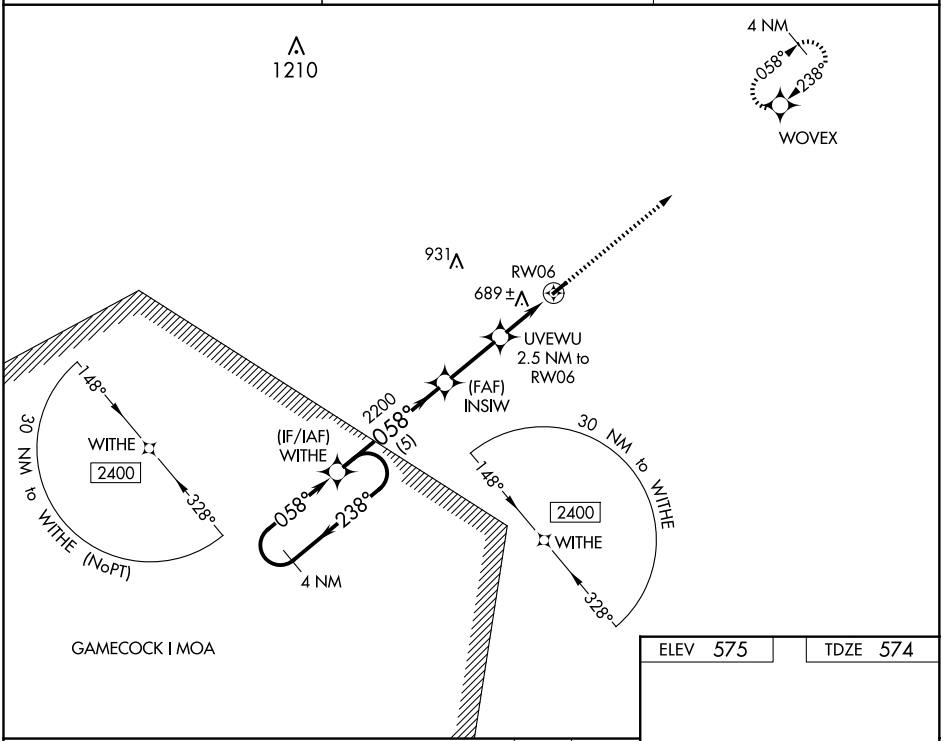


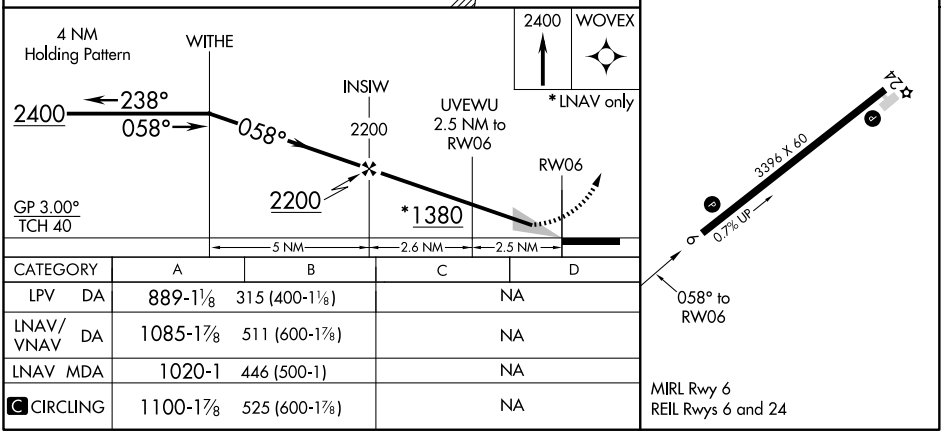


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 889-1⅛ 315 (400-1⅛) | | NA | |
| LNAV/VNAV DA | 1085-1⅞ 511 (600-1⅞) | | NA | |
| LNAV MDA | 1020-1 446 (500-1) | | NA | |
| C CIRCLING | 1100-1⅞ 525 (600-1⅞) | | NA | |



SE-2, 27 NOV 2025 to 25 DEC 2025
SE-2, 27 NOV 2025 to 25 DEC 2025