

VORTAC EAU	APP CRS	Rwy Ldg	5074
113.65	265°	TDZE	894
Chan 83(Y)		Apt Elev	895



VOR/DME RWY 27

MENOMONIE MUNI/SCORE FLD (LUM)

When local altimeter setting not received, use Chippewa Valley Rgnl altimeter setting and increase all MDA 60 feet, increase Circling Cat B and C visibility ¼ SM. VDP NA when using Chippewa Valley Rgnl altimeter setting. Rwy 27 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 then climbing right turn to 2800 direct EAU VORTAC and hold.

AWOS-3PT 118.025	MINNEAPOLIS CENTER 125.3 335.6	UNICOM 123.075 (CTAF) 0
---------------------	-----------------------------------	----------------------------

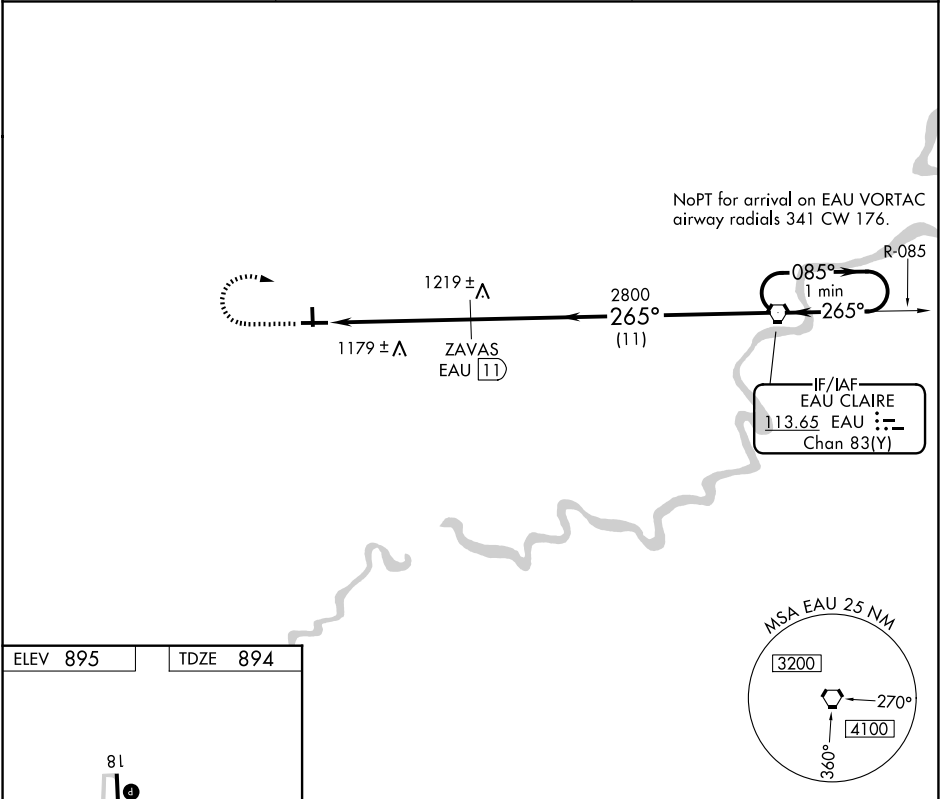

2000	2800	EAU	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 40).	One Minute Holding Pattern
		ZAVAS EAU 11		
		EAU 14.2		
		EAU 16.2		
		2 NM	3.2 NM	11 NM
CATEGORY	A	B	C	D
S-27	1560-1	666 (700-1)	1560-1¾ 666 (700-1¾)	NA
CIRCLING	1560-1 665 (700-1)	1800-1¼ 905 (1000-1¼)	1820-2¾ 925 (1000-2¾)	NA

REIL Rws 9 and 27 0
MIRL Rws 9-27 and 18-36 0