

WAAS CH 48828 W23A	APP CRS 230°	Rwy Idg 5000 TDZE 65 Apt Elev 65
--	------------------------	---

RNAV (GPS) RWY 23

MARION COUNTY (X35)

RNP APCH - GPS.


▼

▲ NA

Rwy 23 helicopter visibility reduction below ¾ SM NA. Boro-VNAV NA. Use Ocala altimeter setting; when not received, use Leesburg altimeter setting and increase LPV DA to 424 feet; increase LNAV/VNAV DA to 579 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat D ¼ SM. Circling Rwy 5, 10, 28 NA at night.

MISSED APPROACH: Climb to 3000 direct ALICS and hold, continue climb-in-hold to 3000.

OCF AWOS-3PT 128.125	JACKSONVILLE APP CON 118.6 251.15	UNICOM 122.8 (CTAF) 0
--------------------------------	---	---------------------------------

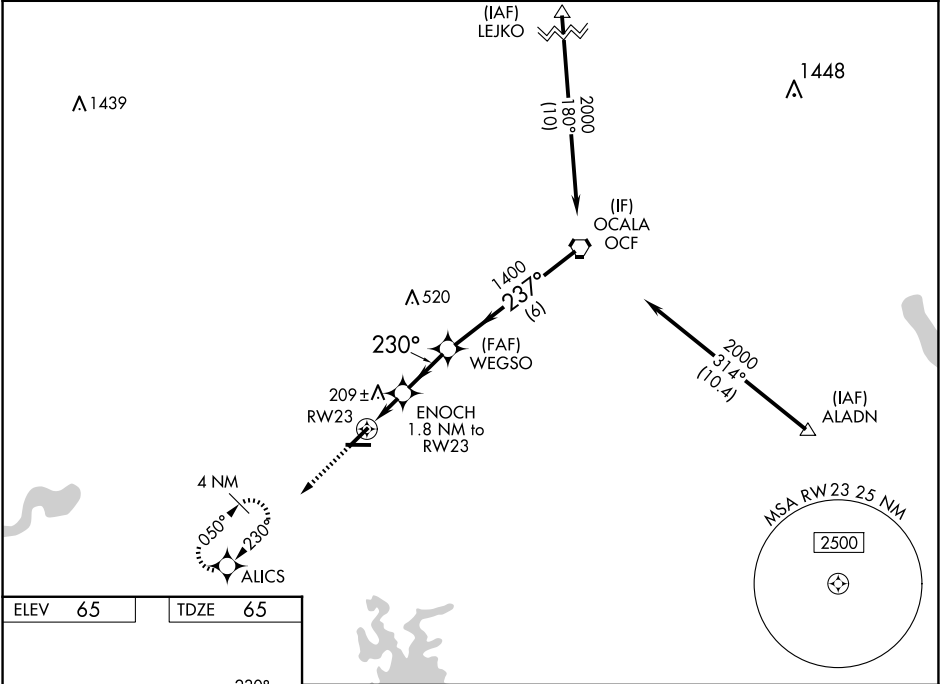

ELEV 65

TDZE 65

MIRL Rwy 5-23 and 10-28 0

3000

ALICS

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 27).

OCF VORTAC

230°

237°

1400

1400

680

1.8 NM

2.3 NM

6 NM

GP 3.00°

TCH 40

CATEGORY	A	B	C	D
LPV DA	374-1 309 (400-1)			
LNAV/VNAV DA	529-1⅓ 464 (500-1⅓)			
LNAV MDA	540-1	475 (500-1)	540-1⅓	475 (500-1⅓)
CIRCLING	540-1	475 (500-1)	580-1½ 515 (600-1½)	760-2¼ 695 (700-2¼)

SE-3, 27 NOV 2025 to 26 DEC 2025

SE-3, 27 NOV 2025 to 26 DEC 2025