

WAAS CH 53636 W04A	APP CRS 038°	Rwy Idg TDZE Apt Elev	3700 352 354
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4


WASILLA (IYS) (PAWS)

RNP APCH.

T Circling NA to Rwy 4S and 22S. Baro-VNAV and VDP NA when using Palmer
A altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA
below -20°C or above 54°C. When local altimeter setting not received, use Palmer
altimeter setting and increase all DA 46 feet, all MDA 60 feet and all visibilities ¼ mile.

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct BQG VORTAC and hold.

AWOS-3P 135.25	ANCHORAGE APP CON 119.1 363.2	CTAF 122.8 0
--------------------------	---	------------------------

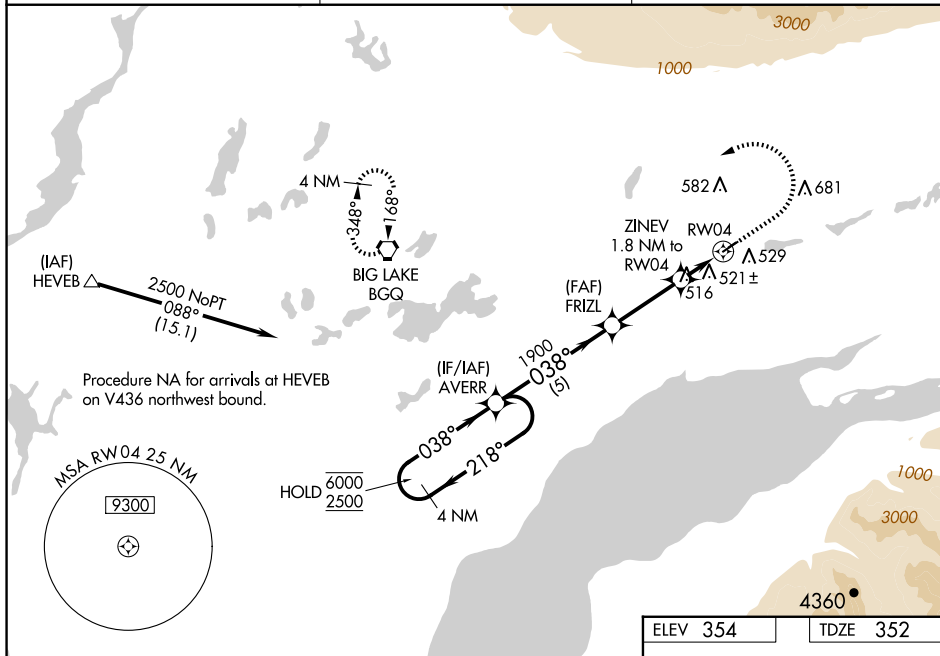

ELEV 354		TDZE 352
----------	--	----------

