

WAAS CH 72822 W03A	APP CRS 029°	Rwy Idg TDZE Apt Elev	6501 246 246
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 3


RALEIGH EXEC JETPORT AT SANFORD-LEE COUNTY (TTA)

Baro-VNAV NA when using Raleigh/Durham altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Raleigh/Durham altimeter setting and increase all DA 81 feet and all MDA 100 feet. Increase LNAV/VNAV all Cats visibility to 1½ mile, LNAV Cats C and D visibility to 1 mile, and Circling Cat C visibility to 2 mile and Cat D visibility to 2¾ mile. For inop MALS, increase LNAV/VNAV all Cats visibility to 1¼ mile and LNAV Cats C and D visibility to 1½ mile. For inop MALS when using Raleigh/Durham altimeter setting, increase LPV all Cats visibility to ¾ mile and LNAV Cats C and D visibility to 1½ mile. VDP NA when using Raleigh/Durham altimeter setting.

MALS

MISSED APPROACH:
Climb to 1300 then climbing left turn to 2100 direct IKTOW and hold.

AWOS-3 120.625	RALEIGH APP CON 125.3 353.675	UNICOM 123.075 (CTAF) 0	GCO 135.075
--------------------------	---	-----------------------------------	-----------------------

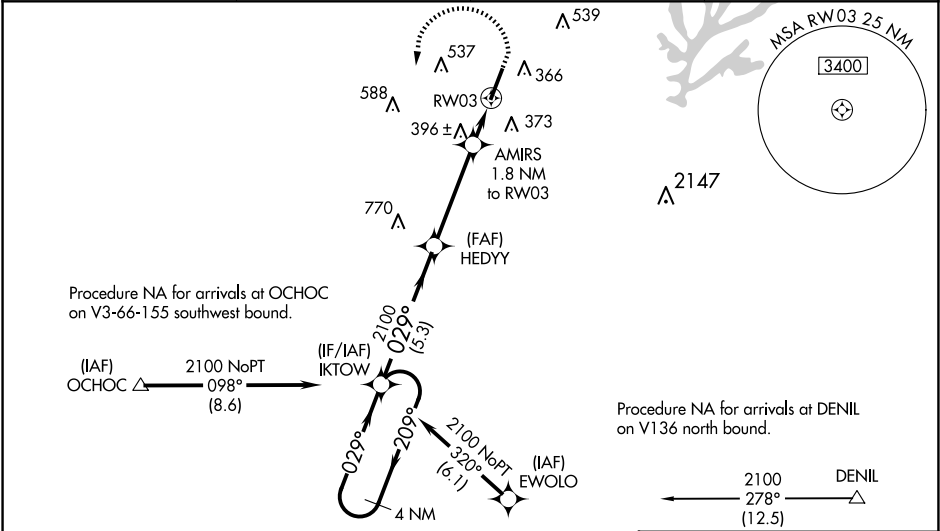

ELEV 246		TDZE 246	
4 NM Holding Pattern		1300 2100 IKTOW	
IKTOW		HEDYY	
2100 ← 209°		029° →	
GP 3.00° TCH 45		2100	
5.3 NM		3.9 NM	
0.6 NM		1.2 NM	
CATEGORY		A	
LPV DA		446-½ 200 (200-½)	
LNAV/VNAV DA		634-¾ 388 (400-¾)	
LNAV MDA		660-½ 414 (500-½)	
CIRCLING		760-1 820-1 840-1½ 960-2¼	
514 (600-1)		574 (600-1)	
594 (600-1½)		714 (800-2¼)	