

WAAS CH 82206 W15A	APP CRS 147°	Rwy Ldg 11820 TDZE 504 Apt Elev 504
--	------------------------	--

RNAV (GPS) RWY 15

GRIFFISS INTL (RME)

RNP APCH-GPS.

▼


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 48°C.

▲

When local altimeter setting not received, use Syracuse altimeter setting and increase LPV DA to 804 feet, LNAV/VNAV DA to 1152 feet and all MDA 100 feet. Increase LNAV/VNAV all Cats, LNAV Cats C and D and Circling Cats B and C visibility ¼ SM. Baro-VNAV and VDP NA when using Syracuse altimeter setting. Circling NA southwest of Rwy 15-33.

MISSED APPROACH: Climb to 3500 direct BOLTZ and hold.

ATIS 118.7	SYRACUSE APP CON 127.425 290.45	GRIFFISS TOWER ★ 118.1 (CTAF) 0 291.7	GND CON 121.9	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

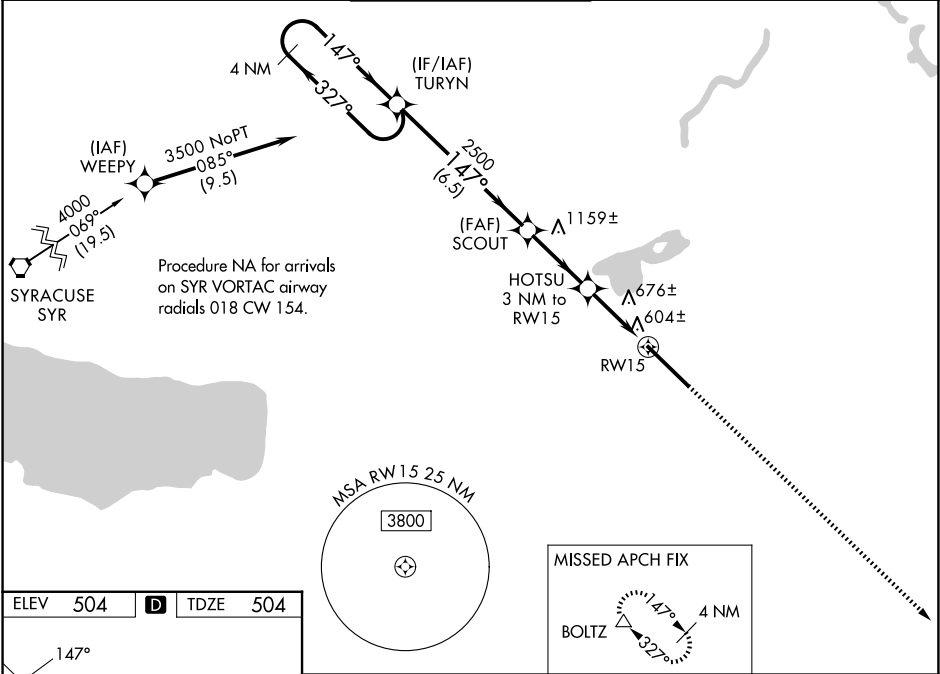

ELEV **504** **D** TDZE **504**

HIRL Rwy 15-33 0

4 NM Holding Pattern				3500		BOLTZ ↑ △	
				*LNAV only			
GP 3.00° TCH 55°				*1.2 NM to RW15		RW15	
CATEGORY				A		B	
LPV DA				704-1		200 (200-1)	
LNAV/ VNAV DA				1052-2		548 (600-2)	
LNAV MDA				940-1 436 (500-1)		940-1½ 436 (500-1½)	
CIRCLING				1140-1 636 (700-1)		1260-1 756 (800-1)	
				1400-2¾ 896 (900-2¾)		1640-3 1136 (1200-3)	

NE-2, 27 NOV 2025 to 25 DEC 2025

NE-2, 27 NOV 2025 to 25 DEC 2025