

WAAS CH 61229 W25A	APP CRS 247°	Rwy Idg TDZE 3453 Apt Elev 3490
--	------------------------	---

RNAV (GPS) RWY 25

ROUNDUP (R.PX)


⚠

NA

When VGSI inop, Circling to Rwy 7 NA at night. Baro-VNAV NA. Use Billings altimeter setting; when not received, procedure NA. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 6600 direct SWIVL and hold

BIL ASOS 126.3	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF)	122.7 0
--------------------------	---	-------------------------------	-----------------------

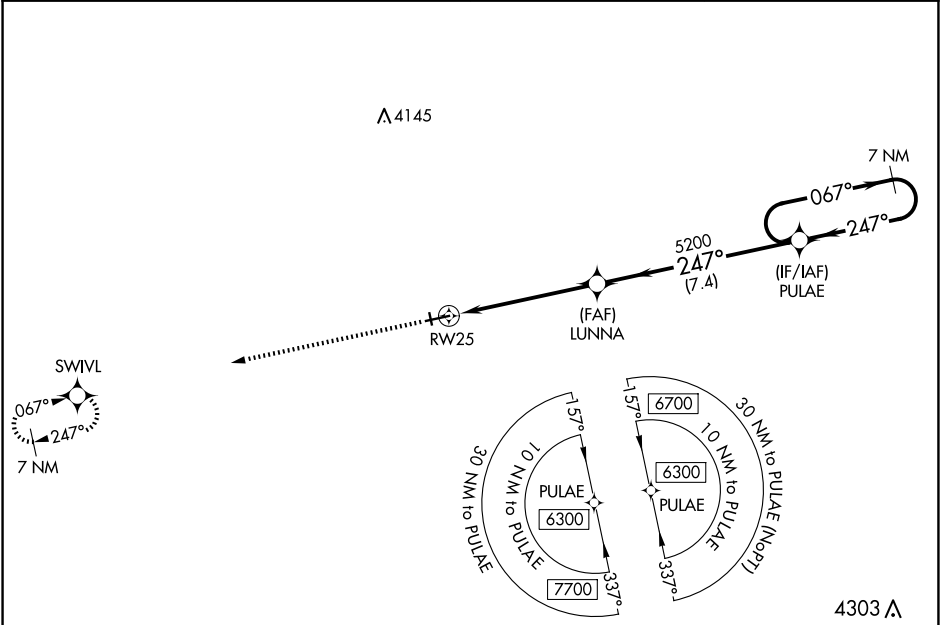

ELEV 3490

TDZE 3453

6600

SWIVL

7

2400 X 100

0.8% UP

5099 X 75

0.7% UP

247° to RW25

34

6600

SWIVL

LUNNA

5200

247°

5200

7 NM Holding Pattern

067°

247°

6300

GP 3.00°

TCH 45

CATEGORY	A	B	C	D
LPV DA	3768-1		315 (300-1)	
LNAV/VNAV DA	3818-1¼		365 (400-1¼)	
LNAV MDA	3900-1	447 (500-1)	3900-1⅔	447 (500-1⅔)
CIRCLING	4000-1	510 (600-1)	4140-1¾ 650 (700-1¾)	4340-2¾ 850 (900-2¾)

MIRL Rwy 7-25 **0**