

WAAS CH 56529 W07A	APP CRS 067°	Rwy Idg TDZE 3490 Apt Elev 3490
--	------------------------	---

RNAV (GPS) RWY 7

ROUNDUP (RPX)


▼

▲ NA

Use Billings altimeter setting, when not received, procedure NA.
When VGSi inop, Straight-in/Circling Rwy 7 procedure NA at night.
DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 6300 direct PULAE and hold.

BIL ASOS 126.3	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF)	122.7
--------------------------	---	-------------------------------	--------------

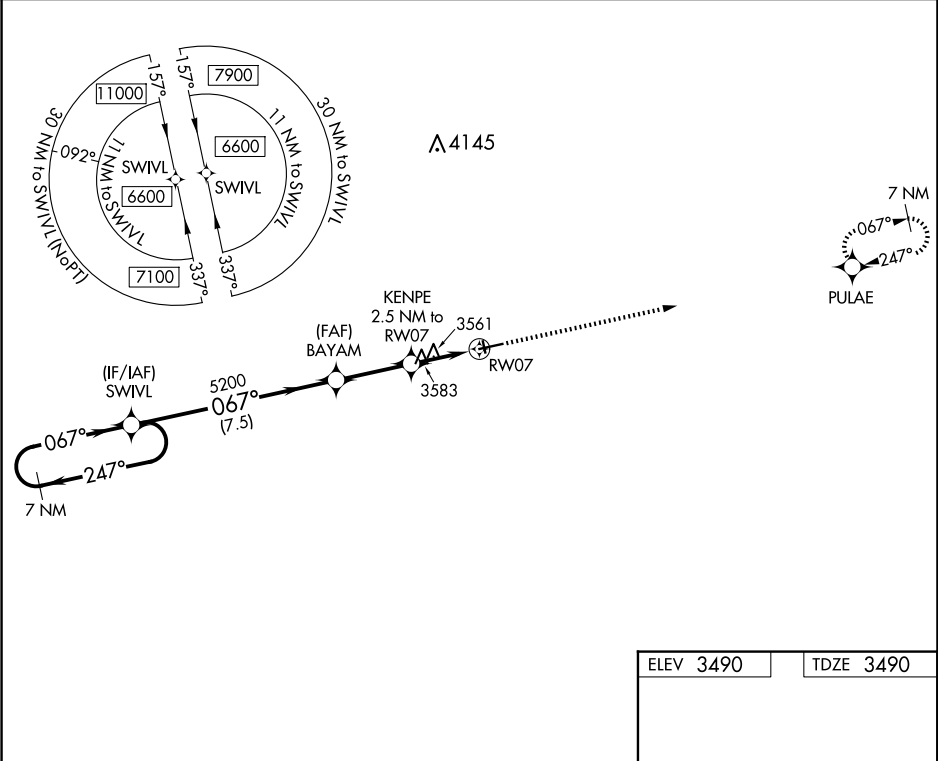

		7 NM Holding Pattern		SWWL		VGSI and descent angles not coincident (VGSI Angle 4.00/TCH 43).		6300		PULAE	
		6600		←247° 067°→		067°		BAYAM		KENPE 2.5 NM to RW07 3.00° TCH 44	
				5200		4320		RW07			
				7.5 NM		2.7 NM		2.5 NM			
CATEGORY		A		B		C		D			
LP MDA		3940-1		450 (500-1)		3940-1 $\frac{3}{8}$		450 (500-1 $\frac{3}{8}$)			
LNAV MDA		3960-1		470 (500-1)		3960-1 $\frac{3}{8}$		470 (500-1 $\frac{3}{8}$)			
CIRCLING		4000-1		510 (600-1)		4140-1 $\frac{3}{4}$ 650 (700-1 $\frac{3}{4}$)		4340-2 $\frac{3}{4}$ 850 (900-2 $\frac{3}{4}$)			

067° to RW07
240° X 100°
0.8% UP
5099 X 75
0.7% UP
25

MIRL Rwy 7-25