





WAAS CH 97517 W35A	APP CRS 355°	Rwy Ldg 7198 TDZE 1776 Apt Elev 1791
--	------------------------	---

RNAV (GPS) RWY 35R
ABILENE RGNL (ABI)

RNP APCH.		For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 45°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats to RVR 6000, and LNAV Cats C/D/E to 1% SM. ** RVR 1800 authorized with use of FD or AP or HUD to DA.		MALSR	MISSED APPROACH: Climb to 4000 direct GOFDO and hold, continue climb-in-hold to 4000.
ATIS 118.25	ABILENE APP CON 125.0 338.3 (EAST) 127.2 282.3 (WEST)	ABILENE TOWER 120.1 257.8	GND CON 121.7 348.6		



ELEV 1791	D	TDZE 1776
-----------	----------	-----------

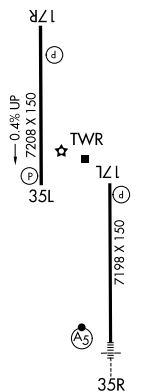

REIL Rwy 35L
HIRL Rwy 17L-35R and
17R-35L

