


WAAS CH 82319 W31A	APP CRS 310°	Rwy Ldg TDZE Apt Elev	7901 3601 3607
--	------------------------	-----------------------------	---


RNAV (GPS) Y RWY 31
RICK HUSBAND AMARILLO INTL (AMA)

⚠ DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 46°C (116°F). When local altimeter setting not received, use Borger altimeter setting: increase DA to 4004 and all visibilities ½ mile; increase all MDA 160 feet and visibility Cat C and D ½ mile. Baro-VNAV and VDP NA when using Borger altimeter setting.	MISSED APPROACH: Climb to 6100 direct MOVEO and on track 317° to LANIT and hold.
--	---

ATIS 118.85 350.3	AMARILLO APP CON★ 119.5 307.0	AMARILLO TOWER★ 118.3 (CTAF) 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-----------------------------------	-------------------------

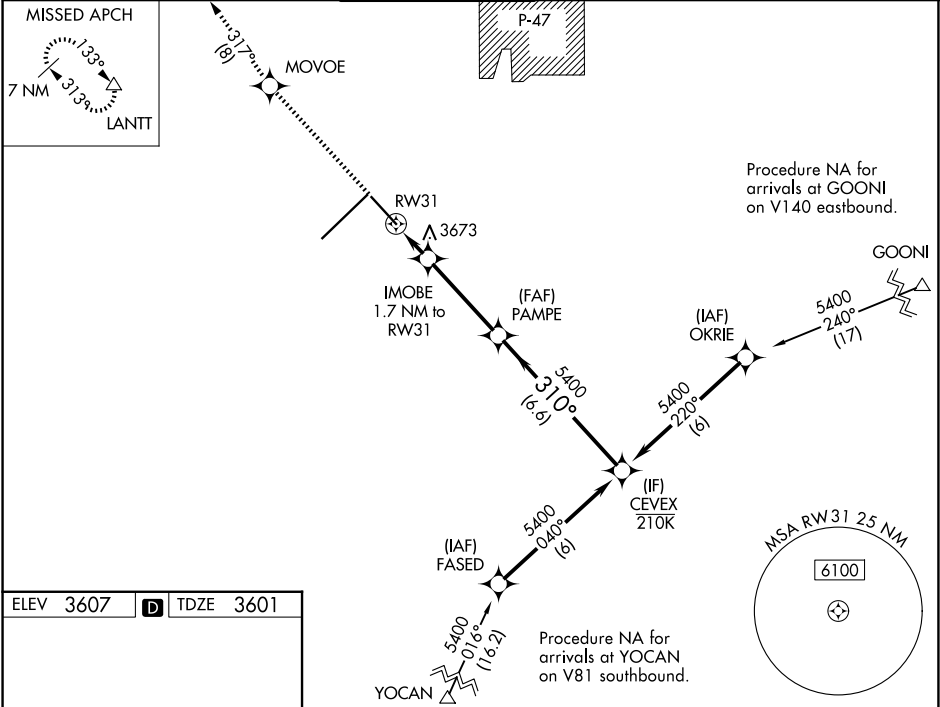

ELEV 3607	D	TDZE 3601
------------------	----------	------------------

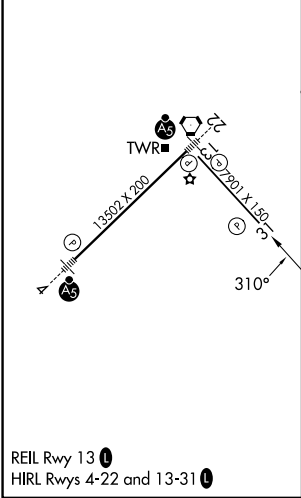

6100 ↑	MOVEO ✦	tr 317° ↻	LANIT △		
*LNAV only. IMOVE 1.7 NM to RW31 *0.9 NM to RW31 *4180 PAMPE 5400 CEVEX 5400 GP 3.04° TCH 52					
0.9 0.8 3.7 NM 6.6 NM					
CATEGORY	A		B	C	D
LPV DA			3851-¾	250 (300-¾)	
LNAV/VNAV DA			3851-¾	250 (300-¾)	
LNAV MDA			3940-1	339 (400-1)	
CIRCLING	4080-1	473 (500-1)	4240-1¾ 633 (700-1¾)	4280-2¼ 673 (700-2¼)	

SC-2, 25 DEC 2025 to 22 JAN 2026

SC-2, 25 DEC 2025 to 22 JAN 2026