

LOC/DME I-BFL	APP CRS	Rwy Ldg	7430
111.9	301°	TDZE	493
Chan 56		Apt Elev	510

ILS or LOC RWY 30R


MEADOWS FLD (BFL)

⚠ Circling NA northeast of Rwy 12L-30R. DME Required. VDP NA with Porterville altimeter setting. When local altimeter setting not received, use Porterville altimeter setting: increase DA to 790 and all visibilities to RVR 2200; increase all MDA 100 feet and visibility Cats C and D to RVR 6000. For inop ALS, increase S-LOC 30R Cat A and B visibility to RVR 5000. For inop ALS when using Porterville altimeter setting, increase SHLS 30R all Cats visibility to RVR 5000.

MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 on EHF VORTAC R-145 direct EHF VORTAC and hold, continue climb-in-hold to 3000.

ATIS 118.6	BAKERSFIELD APP CON ★ 118.9 270.3 (N) 118.8 284.625 (S)	BAKERSFIELD TOWER ★ 118.1 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

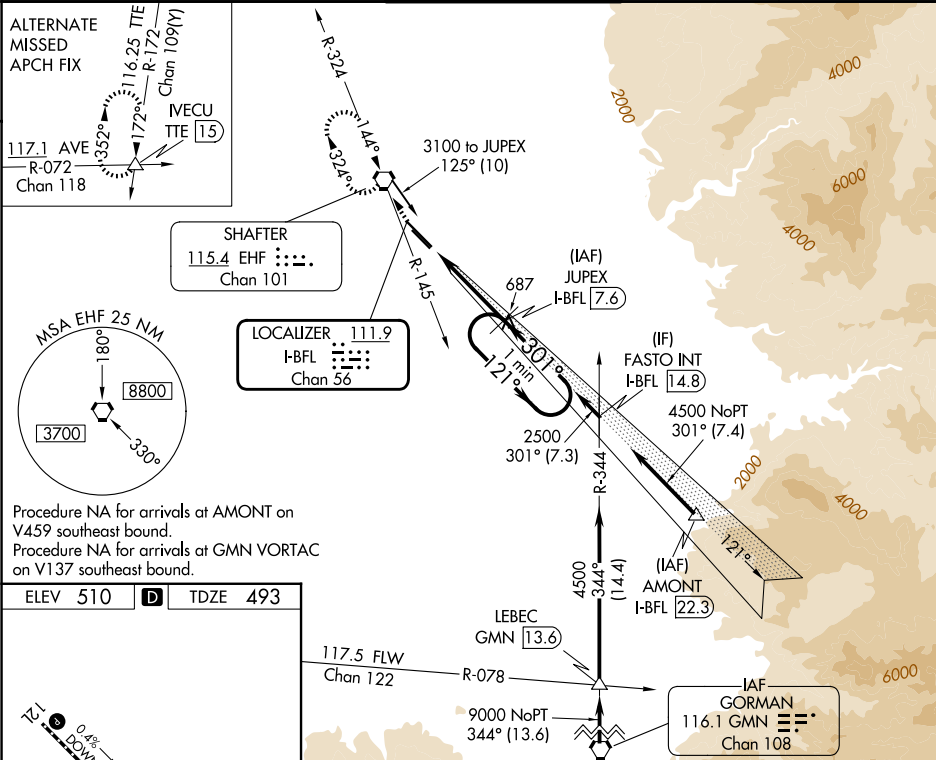

ELEV 510	D	TDZE 493
TDZ/CL Rwy 30R HIRL Rwy 12L-30R MIRL Rwy 12R-30L REIL Rws 12R and 30L		
1000 3000 EHF Use I-BFL DME when on the localizer course. JUPEX I-BFL 7.6 One Minute Holding Pattern		
*LOC only I-BFL 1.4 *I-BFL 2.6 2500 121° 301° 2500 GS 3.00° TCH 51		
CATEGORY	A	B C D
S-ILS 30R	698/18	205 (200-½)
S-LOC 30R	940/24 447 (500-½)	940/45 447 (500-¾)
CIRCLING	960-1 450 (500-1)	960-1½ 450 (500-½) 1060-2 550 (600-2)

SW-3, 25 DEC 2025 to 22 JAN 2026

SW-3, 25 DEC 2025 to 22 JAN 2026