

WAAS CH 72817 W13A	APP CRS 133°	Rwy Ldg 5720 TDZE 67 Apt Elev 70
--	------------------------	---

RNAV (GPS) RWY 13

BATON ROUGE METRO, RYAN FLD (BTR)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hammond altimeter setting and increase all DA 91 feet and all MDA 100 feet, and increase LNAV/VNAV all Cats visibility ¼ mile, and LNAV Cats C and D visibility ⅓ mile. For inop MALSR when using Hammond altimeter setting, increase LPV all Cats visibility to ⅓ mile, LNAV Cat C and D visibility to 1⅓ mile. Baro-VNAV and VDP NA when using Hammond altimeter setting.

MALSR

MISSED APPROACH: Climb to 2300 direct FADAD and hold.

ATIS 125.2	BATON ROUGE APP CON ★ 120.3 278.3	RYAN TOWER ★ 118.45 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 119.4	UNICOM 122.95
----------------------	---	--	-------------------------	--------------------------	-------------------------

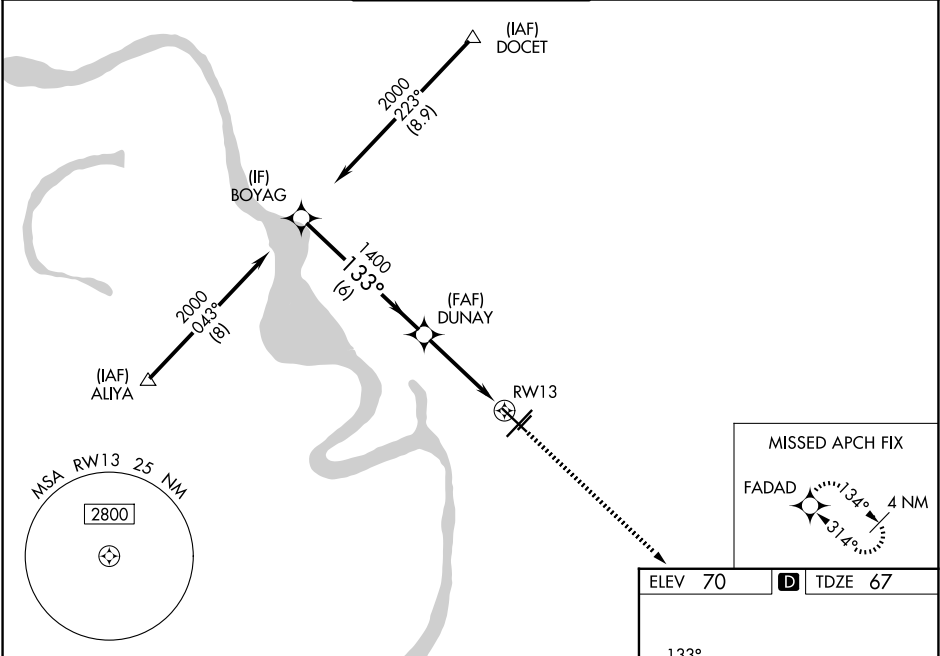

BOYAG		DUNAY		2300 ↑ FADAD ✦	
2000		1400		*1.3 NM to RW13 *LNAV only.	
GP 3.00° TCH 57		1400		RW13	
6 NM		2.7 NM		1.3	
CATEGORY	A	B	C	D	
LPV DA	267-½		200 (200-½)		
LNAV/ VNAV DA	465-⅞		398 (400-⅞)		
LNAV MDA	540-½ 473 (500-½)		540-1 473 (500-1)		
CIRCLING	560-1 490 (500-1)	660-1 590 (600-1)	780-2 710 (800-2)	840-2½ 770 (800-2½)	

ELEV 70

TDZE 67

133°

2300

7500 X 150

398 X 75

22R

TWR

TDZ/CL Rwy 22R

HIRL Rwy 13-31 and 4L-22R

MIRL Rwy 4R-22L