

APP CRS
319°

Rwy Ldg
TDZE **442**
Apt Elev
459

RNAV (RNP) Z RWY 32R
SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

RNP AR APCH - GPS. Authorization required. From PLMAR, CURNN: RF

⚠

NA

ASR


For uncompensated Baro-VNAV systems,
procedure NA below -15°C or above 54°C.
For inop ALS, increase RNP 0.30 all Cats visibility to RVR 4500.

MALSR

AS

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct COFEY and hold.


ATIS 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8
----------------------------	--	------------------------------------	-------------------------------

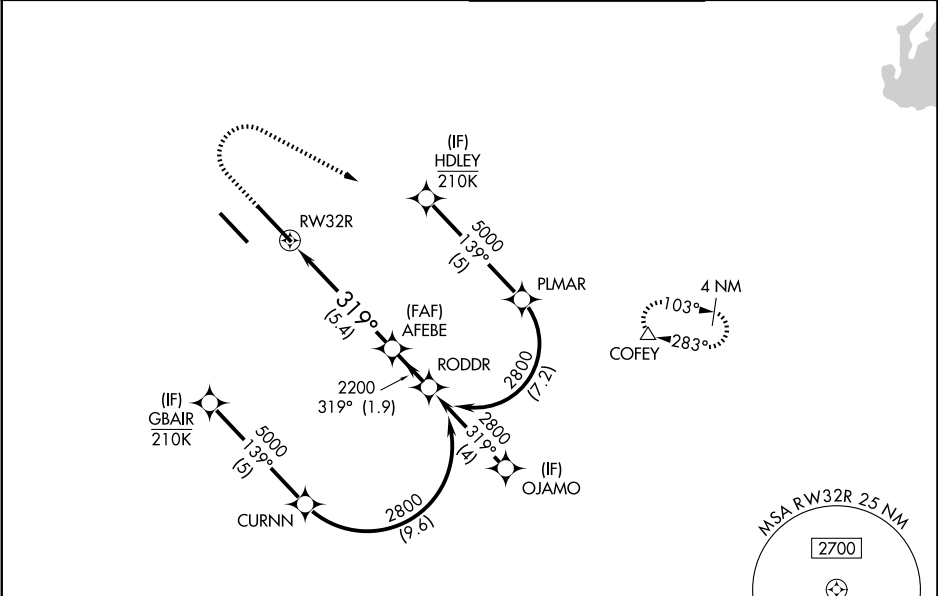

ELEV **459**

D

TDZE **442**

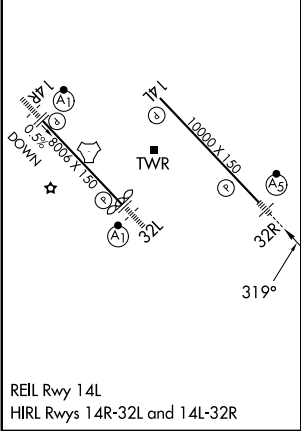

1500

3000

COFEY

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 71).

See planview for multiple IF locations.

RW32R

AFEBE
2200

319°

2800

GP 3.00°
TCH 55

CATEGORY

A

B

C

D

RNP 0.30 DA

747/24

305 (300-1/2)

AUTHORIZATION REQUIRED