

WAAS CH 65947 W32B	APP CRS 319°	Rwy Ldg TDZE Apt Elev	7822 439 459
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 32L

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

RNP APCH-GPS.


Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 5500 RVR, and LNAV Cat C/D visibility to 1½ mile.

ASR * RVR 1800 authorized with use of FD or AP or HUD to DA.

ALS-F1

MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct BUFFE and hold.

ATIS 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8
----------------------------	--	------------------------------------	-------------------------------

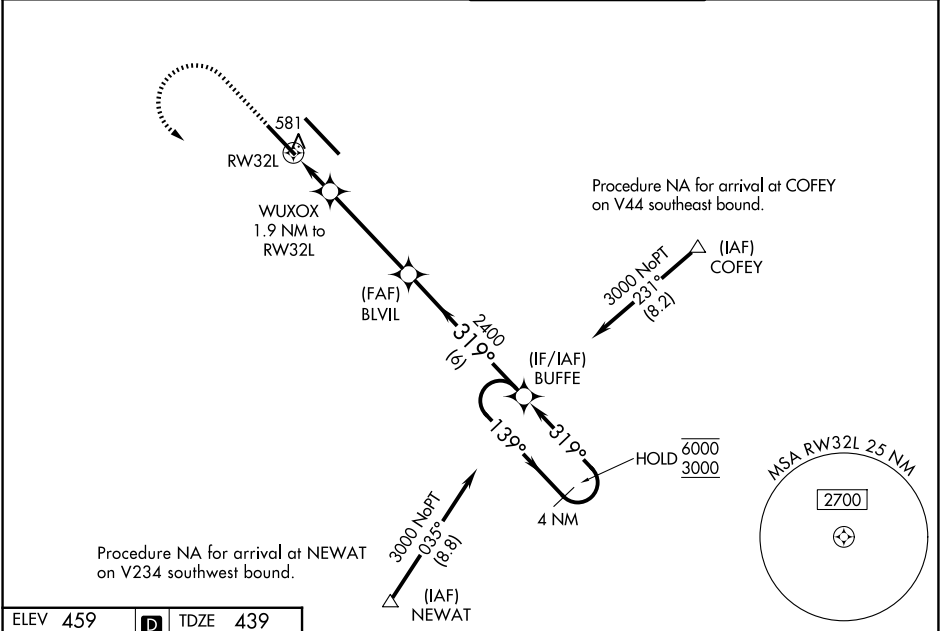

ELEV 459	D	TDZE 439	1500	3000	BUFFE	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).			
						4 NM Holding Pattern			
						GP 3.00° TCH 57			
CATEGORY		A		B		C		D	
LPV DA*		639/24		200 (200-½)					
LNAV/VNAV DA		812/35		373 (400-¾)					
LNAV MDA		920/24		481 (500-½)		920/50		481 (500-1)	
CIRCLING		1000-1 541 (600-1)		1120-1 661 (700-1)		1240-2¼ 781 (800-2¼)		1240-2½ 781 (800-2½)	