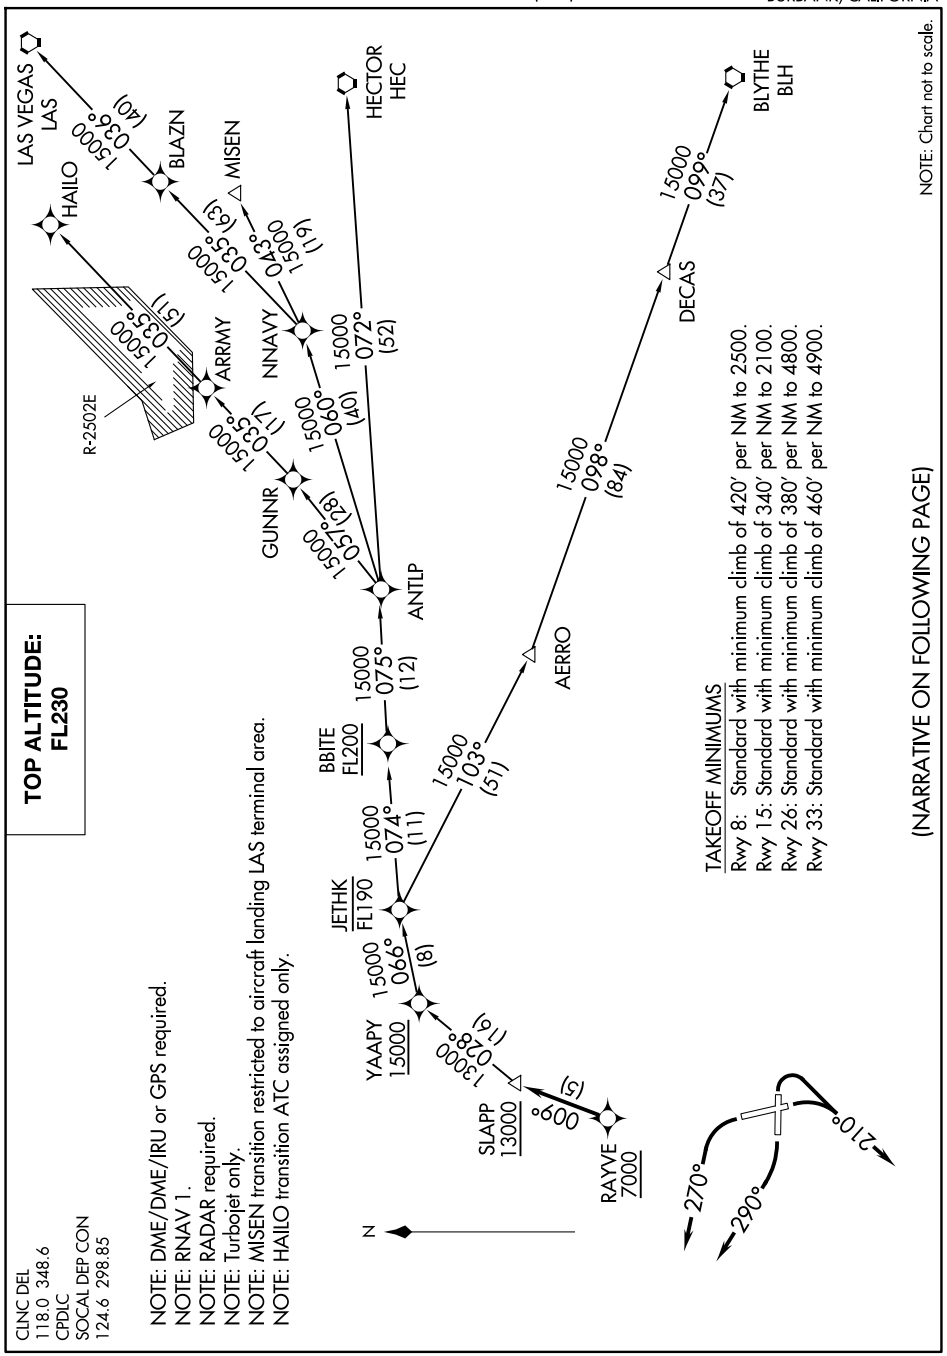
TOP ALTITUDE: FL230
CLNC DEL
118.0 348.6
CPDLC
SOCAL DEP CON
124.6 298.85
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: Turbojet only.
NOTE: MISEN transition restricted to aircraft landing LAS terminal area.
NOTE: HAILO transition ATC assigned only.
N
R-2502E
LAS VEGAS
LAS
HAILO
BLAZN
MISEN
HECTOR
HEC
ARRMY
NNAVY
GUNNR
ANTLP
BBITE
FL200
JETHK
FL190
YAAPY
15000
SLAPP
13000
RAYVE
7000
AERRO
DECAS
BLYTHE
BLH
15000 038° (40)
15000 035° (51)
15000 035° (63)
15000 043° (19)
15000 072° (52)
15000 060° (40)
15000 035° (17)
15000 057° (28)
15000 075° (12)
15000 074° (11)
15000 066° (8)
13000 028° (16)
009° (5)
15000 103° (51)
15000 098° (84)
15000 099° (37)
270°
290°
210°
TAKEOFF MINIMUMS
Rwy 8: Standard with minimum climb of 420' per NM to 2500.
Rwy 15: Standard with minimum climb of 340' per NM to 2100.
Rwy 26: Standard with minimum climb of 380' per NM to 4800.
Rwy 33: Standard with minimum climb of 460' per NM to 4900.
(NARRATIVE ON FOLLOWING PAGE)
NOTE: Chart not to scale.
SW-3, 25 DEC 2025 to 22 JAN 2026