


WAAS CH 61147 W31A	APP CRS 318°	Rwy Ldg TDZE 613 Apt Elev 620
--	------------------------	---

RNAV (GPS) Z RWY 31R

CHICAGO MIDWAY INTL (MDW)

RNP APCH - GPS.				MISSED APPROACH: Climb to 1100 then dimbing left turn to 2600 direct EON VORTAC and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Rwy 31R helicopter visibility reduction below RVR 4000 NA.					
D-ATIS 132.75	CHICAGO APP CON 128.2 353.875	MIDWAY TOWER 135.2 269.125	GND CON 118.075	CLNC DEL 124.625	CPDLC

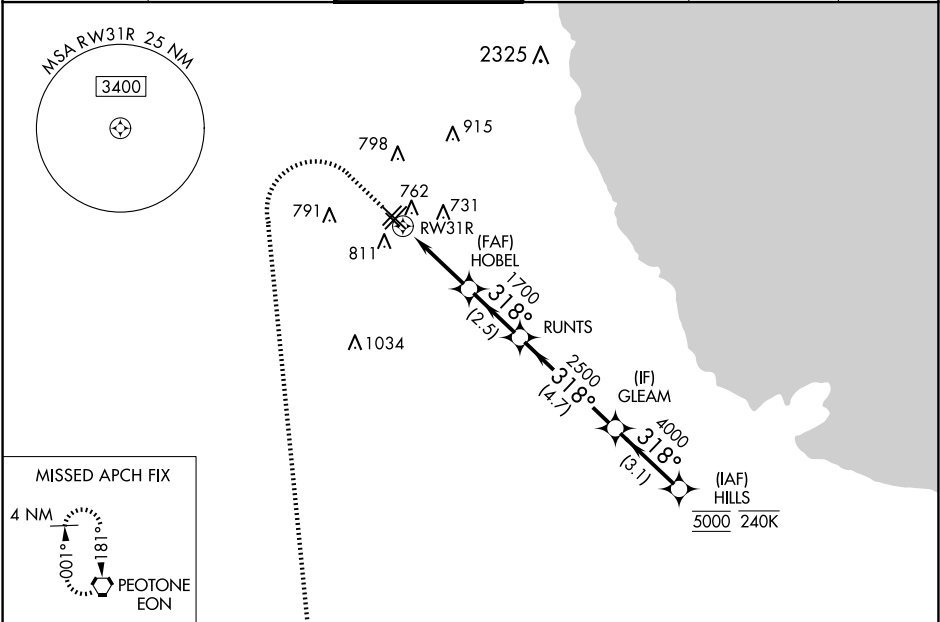

ELEV 620	D	TDZE 613			
REIL Rwy's 4R, 22L and 31R RLS Rwy's 13L and 31R HIRL Rwy's 4R-22L and 13L-31R MIRL Rwy's 4L-22R and 13R-31L			1100	2600	EON
			VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 63).		
CATEGORY			A	B	C
LPV DA			863/40		250 (300-¾)
LNAV/VNAV DA			953/50		340 (400-1)
LNAV MDA			1020/55 407 (400-1)		1020/60 407 (400-1¼)
CIRCLING			1120-1 500 (500-1)		1340-2 720 (800-2) 1340-2¼ 720 (800-2¼)