

WAAS CH 49112	APP CRS 352°	Rwy Ldg TDZE 6075 Apt Elev 6187
-------------------------	------------------------	---

RNAV (GPS) Y RWY 35L
CITY OF COLORADO SPRINGS MUNI (COS)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP- 0.3 NA. For inop MALSR increase LNAV Cat C and D visibility to RVR 5500. RADAR monitoring required when R-2601 in use. # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR



MISSED APPROACH:
Climb to 6700 then climbing right turn to 9000 direct ADANE and hold.

ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6	CLNC DEL 134.45 363.125
----------------------------	---	-------------------------------------	-------------------------------	-----------------------------------

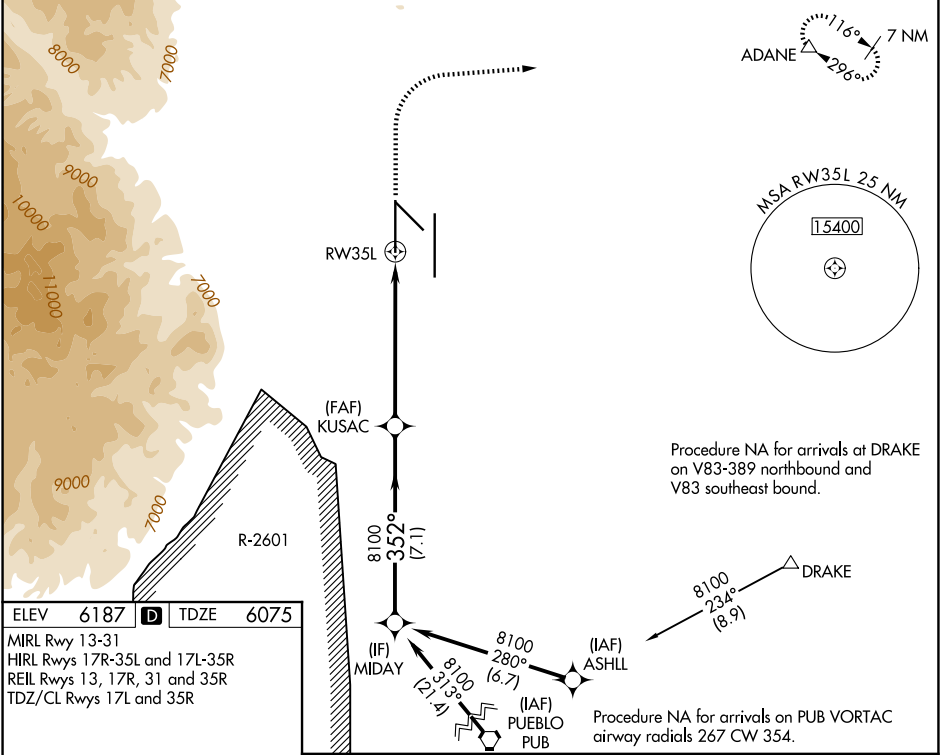

ELEV 6187 **D** TDZE 6075

MIRL Rwy 13-31
HIRL Rwys 17R-35L and 17L-35R
REIL Rwys 13, 17R, 31 and 35R
TDZ/CL Rwys 17L and 35R

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).				6700	9000	ADANE
MIDAY				* 1 NM to RW35L * LNAV only		
GP 3.00° TCH 55						
8100 — 352° — 8100						
7.1 NM — 5.3 NM — 1 NM						
CATEGORY	A	B	C	D		
LPV DA #	6275/24			200 (100-½)		
LNAV/VNAV DA	6380/30			305 (200-⅝)		
LNAV MDA	6440/24	365 (300-½)	6440/35	365 (300-⅝)		
CIRCLING	6740-1 553 (600-1)	6800-1 613 (700-1)	7040-2½ 853 (900-2½)	7260-3 1073 (1100-3)		

SW-1, 25 DEC 2025 to 22 JAN 2026

SW-1, 25 DEC 2025 to 22 JAN 2026