

COLUMBUS, OHIO

AL-94 (FAA)

25331

WAAS CH 86619 W28B	APP CRS 281°	Rwy Ldg TDZE Apt Elev	8000 813 815
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 28R
JOHN GLENN COLUMBUS INTL (CMH)

RNP APCH.

▲ Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. LNAV procedure NA during simultaneous operations.

▲ Use of FD or AP providing RNAV track guidance required during simultaneous operations.


For inop ALS, increase LNAV/VNAV all Cats visibility or RVR 4500; increase LNAV Cat C/D visibility to 1 3/8 SM. #RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR





MISSED APPROACH:
Climb to 1400 then
climbing right turn to
3000 direct APE
VORTAC and hold.

D-ATIS 124.6	COLUMBUS APP CON 125.95 371.975	COLUMBUS TOWER 132.7 257.8	GND CON 121.9 348.6
-----------------	------------------------------------	-------------------------------	------------------------

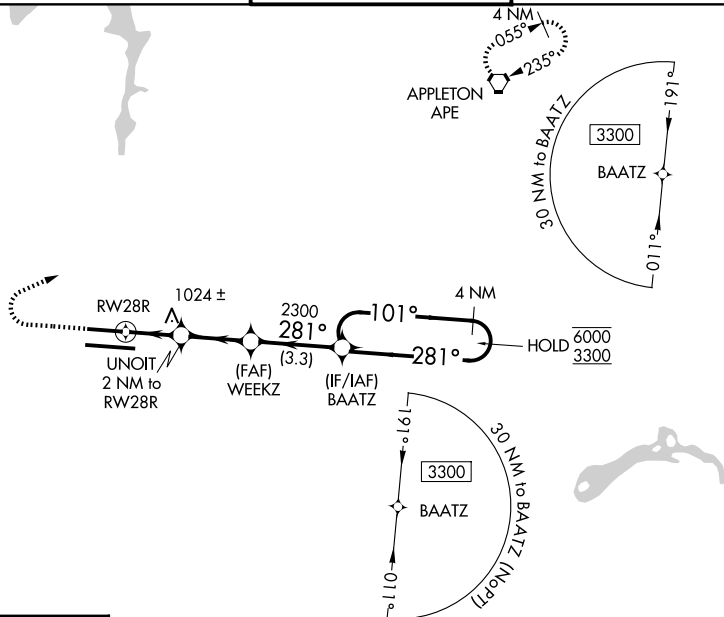

ELEV 815	D	TDZE 813
----------	----------	----------

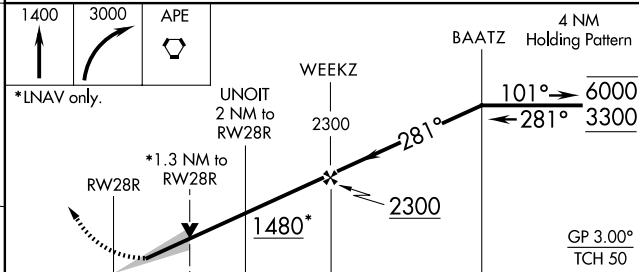

		1.3 NM	0.7 NM	2.5 NM	3.3 NM	
CATEGORY	A	B	C	D		
LPV DA #	1013/24 200 (200-½)					
LNAV/VNAV DA	1096/24 283 (300-½)					
LNAV MDA	1280/24 467 (500-½)			1280/50 467 (500-1)		
CIRCLING	1340-1 525 (600-1)			1520-2 705 (800-2)		1520-2¼ 705 (800-2¼)

TDZL/RCLS Rwy 10R-28L
HIRL Rwy 10R-28L and 10L-28R

COLUMBUS, OHIO

Amdt 3 22APR21

JOHN GLENN COLUMBUS INTL (CMH)

40°00'N-82°54'W

RNAV (GPS) Y RWY 28R

EC-2, 25 DEC 2025 to 22 JAN 2026

EC-2, 25 DEC 2025 to 22 JAN 2026