

DAYTON, OHIO

ILS or LOC RWY 5L

LOC I-FAE <u>109.7</u>	APCH CRS 053°	Rwy Idg 12,600 TDZE 803 Arpt Elev 823
----------------------------------	-------------------------	--

[USAF]

WRIGHT-PATTERSON AFB (KFFO)

DME or RADAR required for Localizer.

ALSF-1


† MISSED APPROACH: Climb to 2000 via FFO R-053 at 5 DME, turn right direct CLACK climbing to 3100 and hold.

ATIS 124.475 269.9	COLUMBUS APP CON 118.85 269.275	PATTERSON TOWER 127.8 281.45	GND CON 121.8 335.8
-----------------------	------------------------------------	---------------------------------	------------------------


**** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1 $\frac{3}{8}$ miles.**

*** When Rwy 23R VGSI inop,
circling to Rwy 23R NA at night.


† Missed approach requires use of RNAV or ATC RADAR monitoring.

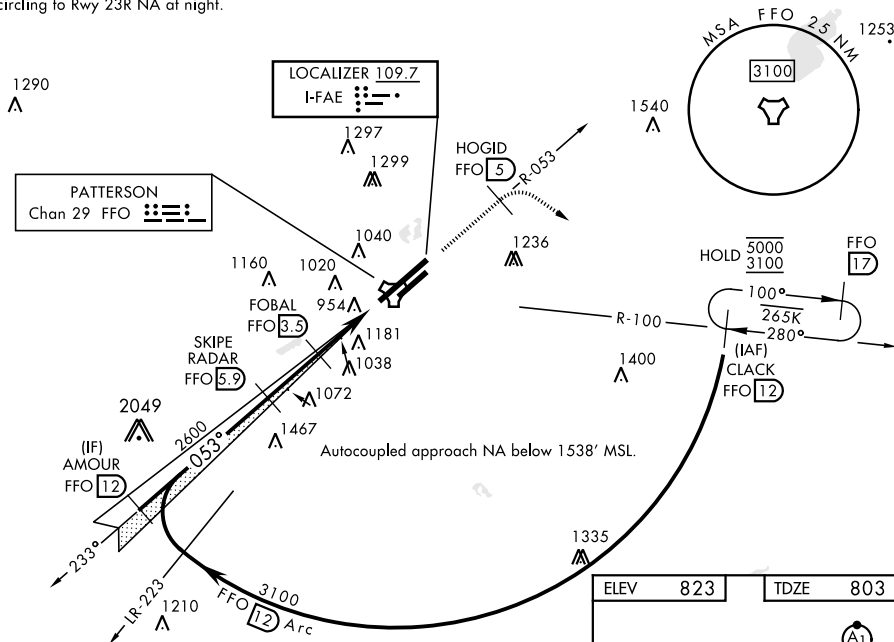

EMERG SAFE ALT 100 NM 3700

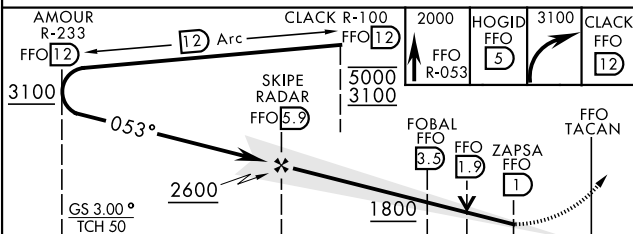

CATEGORY	A	B	C	D	E
S-ILS 5L *	1003/24		200	(200-½)	
S-LOC 5L **	1280/24	476 (500-½)	1280/50 476 (500-1)		
 CIRCLING ***	1380-1 557 (600-1)	1440-1 617 (700-1)	1560-2 737 (800-2)	1620-2½ 797 (800-2½)	1620-2¾ 797 (800-2¾)

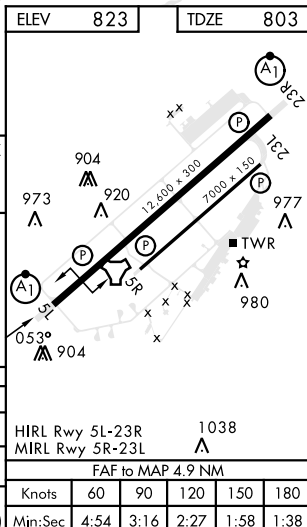

DAYTON, OHIO
Amdt 4 28DEC23

39° 50'N-84° 03'W

WRIGHT-PATTERSON AFB (KFFO)

ILS or LOC RWY 5L