

APP CRS	Rwy Ldg	12020
222°	TDZE	3950
	Apt Elev	3962

RNAV (RNP) Z RWY 22

EL PASO INTL (ELP)

RNP AR APCH.


▼

For uncompensated Baro-VNAV systems, procedure NA below -8°C ASR or above 54°C. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 4000 and RNP 0.30 all Cats visibility to RVR 4500.


MALSR

MISSED APPROACH: Climb to 4400 then climbing left turn to 7500 direct FABAN and hold.

D-ATIS	EL PASO APP CON	EL PASO TOWER	GND CON	CLNC DEL
120.0 254.3	124.25 298.85	118.3 239.275	121.9 348.6	125.0 379.1

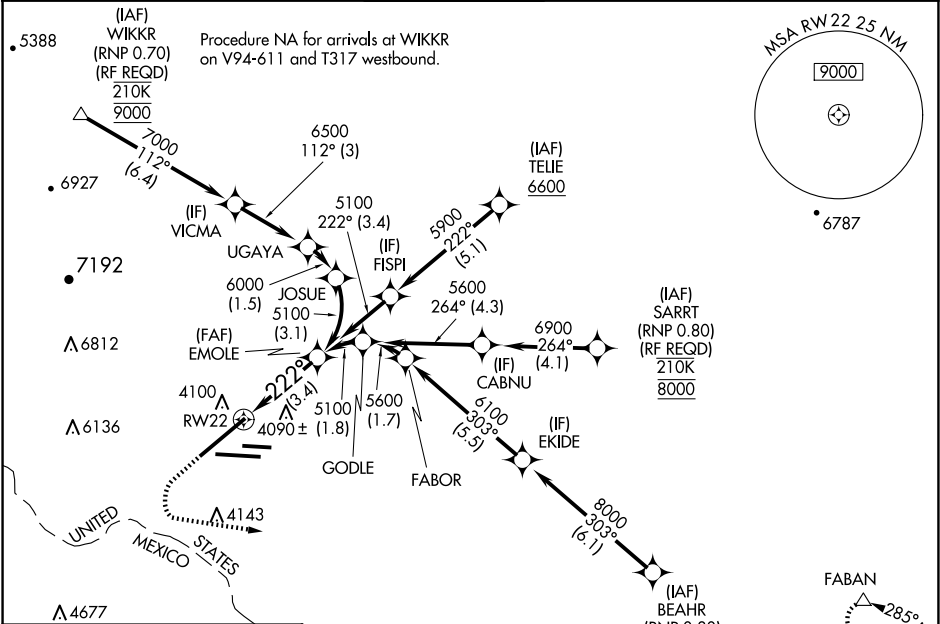

ELEV	3962	TDZE	3950
------	------	------	------



4400 ↑	7500 ↙	FABAN △	EMOLE 5100	
VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 70).				
RW22 ↙				
See planview for multiple IF locations.				
3.4 NM				
CATEGORY	A	B	C	D
RNP 0.10 DA	4200/24		250 (300~½)	
RNP 0.30 DA	4270/27		320 (400~⅝)	

MIRL Rwy 8L-26R
REIL Rws 4 and 8R
HIRL Rws 4-22 and 8R-26L

AUTHORIZATION REQUIRED