



WAAS CH 61310 W27A	APP CRS 273°	Rwy Ldg TDZE 139 Apt Elev 147
--	------------------------	---

RNAV (GPS) RWY 27

FLORENCE RGNL (FLO)

RNP APCH - GPS.		MISSED APPROACH: Climb to 2200 direct IMOVE and hold, continue climb-in-hold to 2200.
	Circling Rwy 1, 19 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C.	

ATIS 123.625	FLORENCE APP CON★ 118.6 341.7 (256°-074°) 135.25 316.15 (075°-255°)	FLORENCE TOWER★ 125.1 (CTAF) 0 353.85	GND CON 121.9 353.85	UNICOM 122.95
------------------------	---	--	--------------------------------	-------------------------

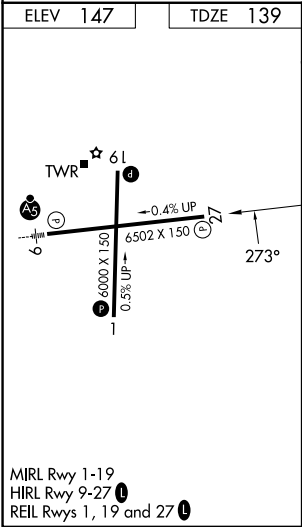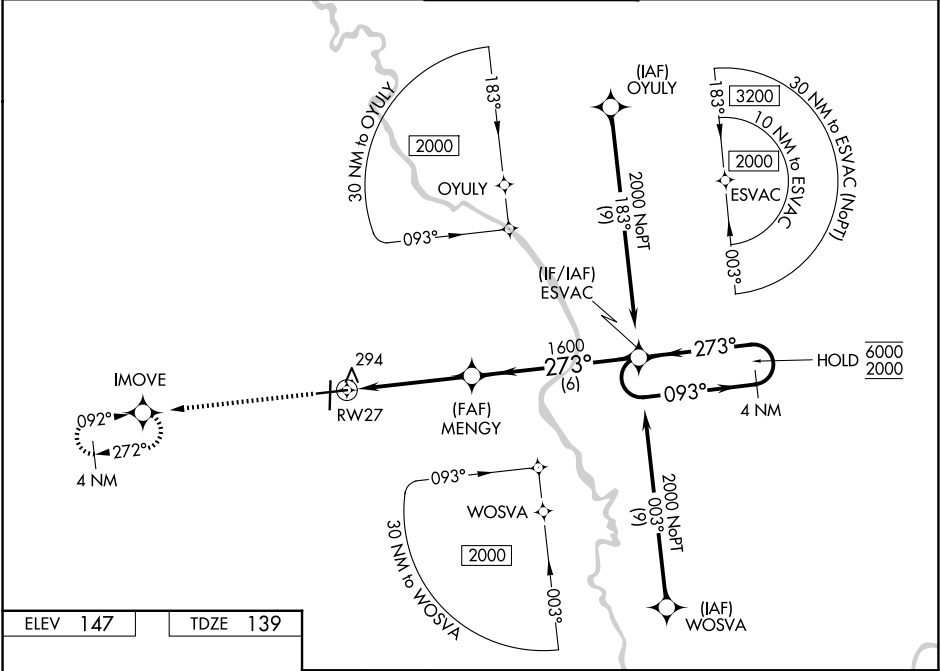

2200 IMOVE		ESIVAC 4 NM Holding Pattern	
MINGY 1600		273° 6000 2000	
RW27 1.2 NM to RW27		GP 3.00° TCH 46	
CATEGORY		A	
LPV DA		389-1 250 (300-1)	
LNAV/VNAV DA		465-1 326 (400-1)	
LNAV MDA		560-1 421 (500-1)	
CIRCLING		640-1 493 (500-1)	