


WAAS CH 69220 W13A	APP CRS 133°	Rwy Ldg TDZE 836 Apt Elev 836
--	------------------------	---

RNAV (GPS) RWY 13

SMITH FLD (SMD)

RNP APCH. ▼ NA -21°C Procedure NA at night. Rwy 13 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Fort Wayne Intl altimeter setting: increase LPV DA to 1162 feet; LNAV/VNAV DA to 1435 feet; increase all MDA 40 feet and LNAV Cat C visibility ¼ SM. Baro-VNAV NA when using Fort Wayne Intl altimeter setting.		MISSED APPROACH: Climb to 2600 direct CUKEP and on track 043° to ZOBID and on track 313° to OHOCY and on track 280° to UDOMY and hold.
AWOS-3 124.55	FORT WAYNE APP CON 127.2 284.6	UNICOM 122.8 (CTAF) 0

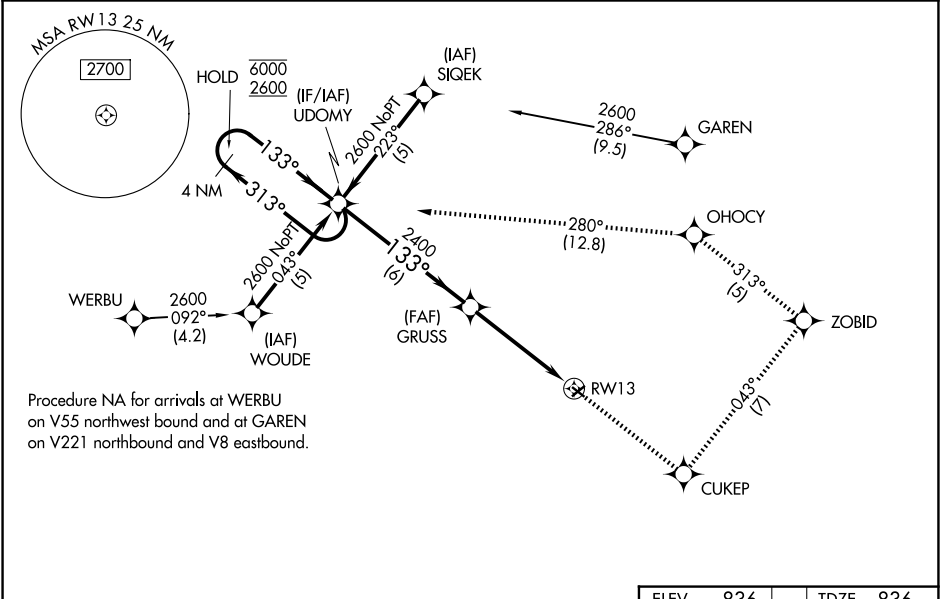

4 NM Holding Pattern		UDOMY		GRUSS		RWY13	
6000 ← 313° 2600 → 133°		133°		2400		2400	
GP 3.00° TCH 40				6 NM		4.7 NM	
CATEGORY	A	B	C	D			
LPV DA	1135-1	299 (300-1)		NA			
LNAV/VNAV DA	1408-2	572 (600-2)		NA			
LNAV MDA	1340-1	504 (600-1)	1340-1½ 504 (600-1½)	NA			
CIRCLING	1400-1	564 (600-1)	1940-3 1104 (1200-3)	NA			

2600

↑

CUKEP

✧

tr 043°

✧

tr 313°

✧

OHO CY

✧

tr 280°

✧

UDOMY

✧

133°

313° X 100

282° X 60

2600

2400

2200

2000

1800

1600

1400

1200

1000

800

600

400

200

0

MIRL Rwy 5-23 and 13-31

0