

WAAS CH 81803 W29A	APP CRS 292°	Rwy Ldg 9227 TDZE 333 Apt Elev 336
--	------------------------	---

RNAV (GPS) RWY 29R


FRESNO YOSEMITE INTL (FAT)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

ALSF-2

MISSED APPROACH: Climb to 2000 direct MORLA and hold.

ATIS 121.35 273.6	FRESNO APP CON 119.6 351.95	FRESNO TOWER 118.2 251.1	GND CON 121.7 348.6	CLNC DEL 124.35 348.6
-----------------------------	---------------------------------------	------------------------------------	-------------------------------	---------------------------------

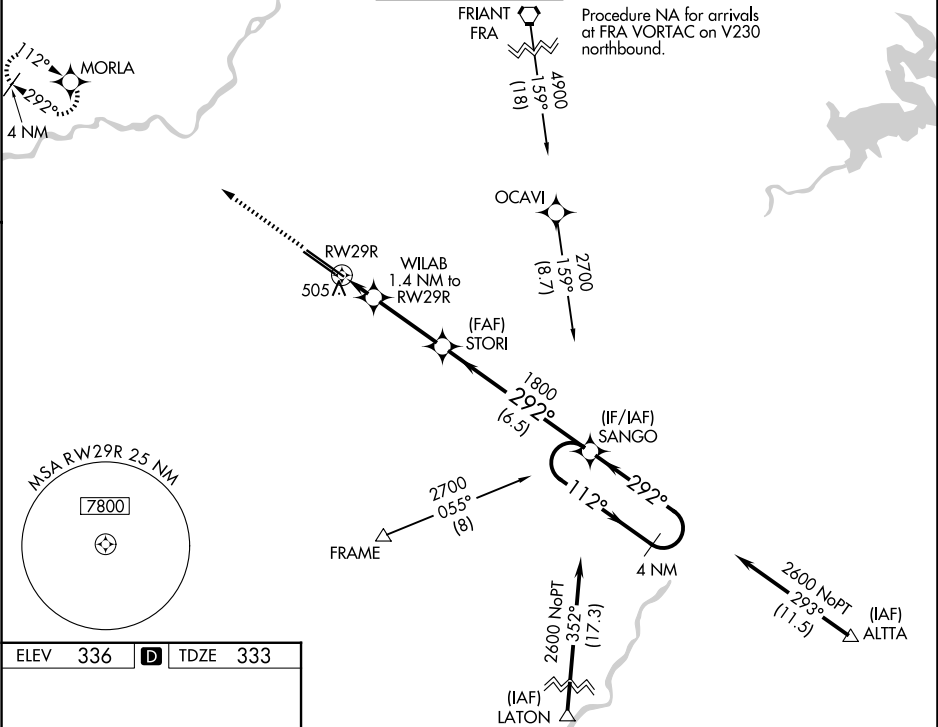

ELEV 336, TDZE 333

Key locations and altitudes: RW29R, WILAB (1.4 NM to RW29R), STORI (1800), SANGO (292°), LATON (2600), ALTA (2600).

Angles: 112°, 292°, 159°, 159°, 055°, 352°, 112°.

Distances: 4 NM, 1.4 NM, 1.8 NM, 1.4 NM, 3 NM, 6.5 NM.

MSA RW29R 25 NM: 7800.

ELEV 336, TDZE 333.

REIL Rwy 11L and 11R

HIRL Rwy 11L-29R

MIRL Rwy 11R-29L

TDZ/CL Rwy 29R

2000	MORLA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 76).		4 NM
*LNAV only		STORI 1800	SANGO Holding Pattern	112° 2600
WILAB 1.4 NM to RW29R		RW29R	292°	1800
*820		1.4 NM	3 NM	6.5 NM
CATEGORY	A	B	C	D
LPV DA	533/18		200 (200-½)	
LNAV/VNAV DA	689/30		356 (400-⅝)	
LNAV MDA	760/24	427 (500-½)	760/40	427 (500-¾)
CIRCLING	820-1	484 (500-1)	920-1½ 584 (600-1½)	920-2 584 (600-2)