

WAAS CH 97606 W27A	APP CRS 273°	Rwy Ldg TDZE Apt Elev	6008 826 826
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27

GOSHEN MUNI ((GSH))


RNP APCH - GPS.

▼

Baro-VNAV and VDP NA when using ASW altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA to Rwy 5 and 23. Rwy 27 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use ASW altimeter setting and increase LPV DA to 1251 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1346 feet. Increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat D ¼ SM.

MISSED APPROACH:
Climb to 2500 direct JANUG and on 274° track to CPONE and hold.

ASOS 121.45	SOUTH BEND APP CON * 132.05 257.8	CLNC DEL 125.25	UNICOM 123.05 (CTAF) 0
-----------------------	---	---------------------------	----------------------------------

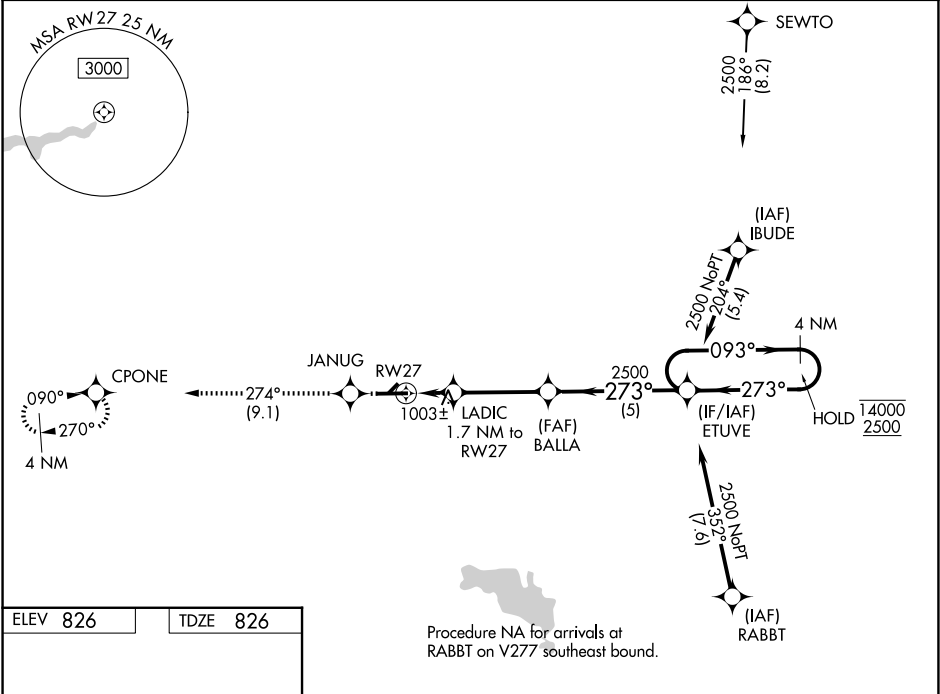

ELEV 826

TDZE 826

HIRL Rwy 9-27 0

REIL Rwy 9 and 27 0

2500	JANUG	CPONE				
↑	tr 274°					
		LADIC	BALLA	ETUVE	4 NM Holding Pattern	
		1.2 NM to RW27	1.7 NM to RW27	2500	093° → 14000	← 273° 2500
		1400	2500		GP 3.00° TCH 49	
		1.2 NM	0.5	3.4 NM	5 NM	
CATEGORY	A		B		C	
LPV DA	1212-1⅛		386 (400-1⅛)			
LNAV/VNAV DA	1307-1⅛		481 (500-1⅛)			
LNAV MDA	1260-1	434 (500-1)	1260-1¼	434 (500-1¼)	1260-1½	434 (500-1½)
CIRCLING	1300-1	474 (500-1)	1320-1	494 (500-1)	1500-2	674 (700-2)
					1560-2¼	734 (800-2¼)

EC-2, 25 DEC 2025 to 22 JAN 2026

EC-2, 25 DEC 2025 to 22 JAN 2026