

WAAS CH 90315 W23B	APP CRS 234°	Rwy Ldg TDZE 864 Apt Elev 926
--	------------------------	---

RNAV (GPS) RWY 23R
PIEDMONT TRIAD INTL (GSO)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with ILS or LOC RWY 23L, ILS RWY 23L CAT (II). LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR


⚠

MISSED APPROACH: Climb to 2500 direct JEVEN and hold.

D-ATIS 128.55	GREENSBORO APP CON 124.35 269.225 (250°-049°) 126.6 327.075 (050°-249°)	GREENSBORO TOWER 119.1 290.325	GND CON 121.9 348.6	CLNC DEL 121.75
-------------------------	---	--	-------------------------------	---------------------------

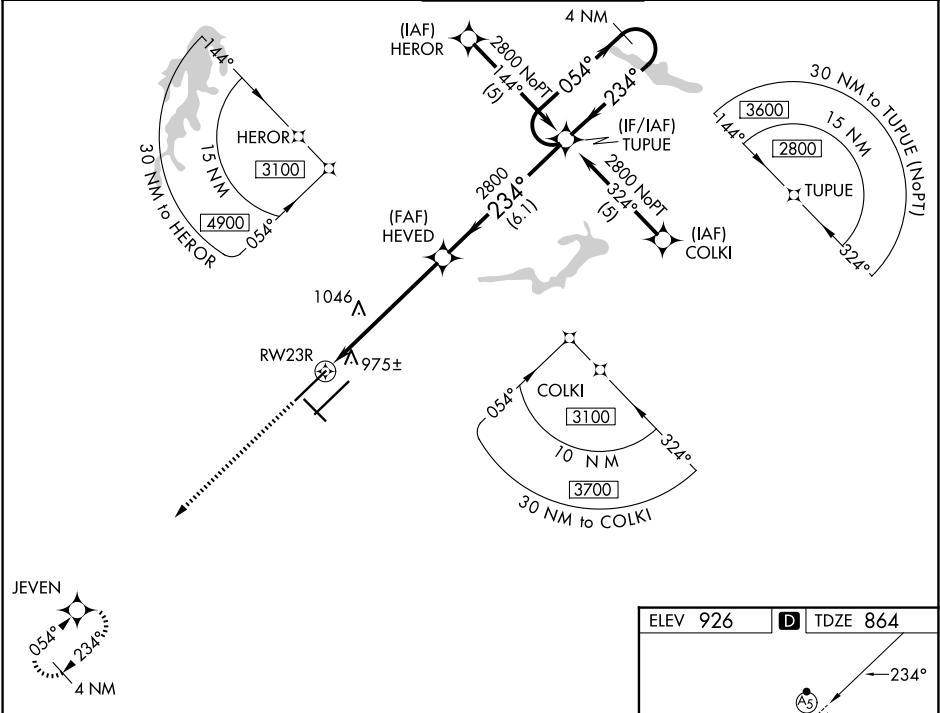

2500	JEVEN	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).			
*LNAV only.		HEVED	TUPUE	4 NM Holding Pattern	
RW23R		2800	2800	2800	GP 3.00° TCH 55
1.4 NM		4.4 NM	6.1 NM		
CATEGORY	A	B	C	D	
LPV DA	1064/18		200 (200-½)		
LNAV/VNAV DA	1414-1½		550 (500-1½)		
LNAV MDA	1340/24	476 (500-½)	1340/50	476 (500-1)	
CIRCLING	1440-1	514 (600-1)	1700-2¼ 774 (800-2¼)	1700-2½ 774 (800-2½)	

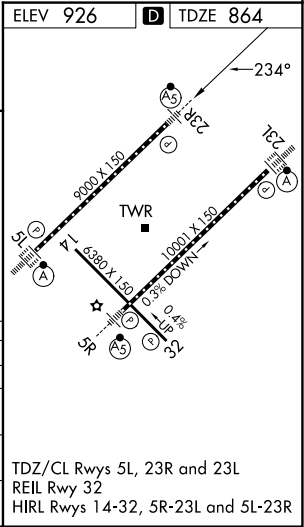

SE-2, 25 DEC 2025 to 22 JAN 2026

SE-2, 25 DEC 2025 to 22 JAN 2026