

LOC I-TOL
109.7

APP CRS
072°

Rwy Ldg 10599
TDZE 683
Apt Elev 683

ILS Z or LOC Z RWY 7
EUGENE F KRANZ TOLEDO EXPRESS (TOL)

ADF or RADAR required for procedure entry. RNAV 1-GPS required.
ADF required for LOC only.



ALSIF-2
A

MISSED APPROACH: Climb to 1200 then climbing right turn to 2500 direct WUPTA and hold.

For inop ALS, increase S-ILS 7 Cat E visibility to RVR 4000,
S-LOC 7 Cat C/D/E visibility to 1 3/8 SM.

ASR

ATIS 118.75 290.225	TOLEDO APP CON 134.35 317.55	TOLEDO TOWER 118.1 285.4	GND CON 121.9 348.6	CLNC DEL 121.75 348.6
------------------------	---------------------------------	-----------------------------	------------------------	--------------------------

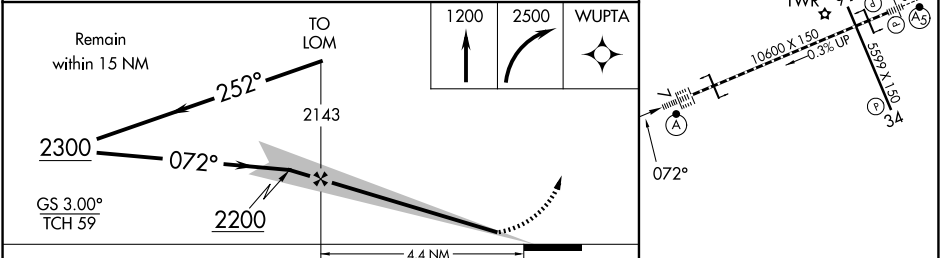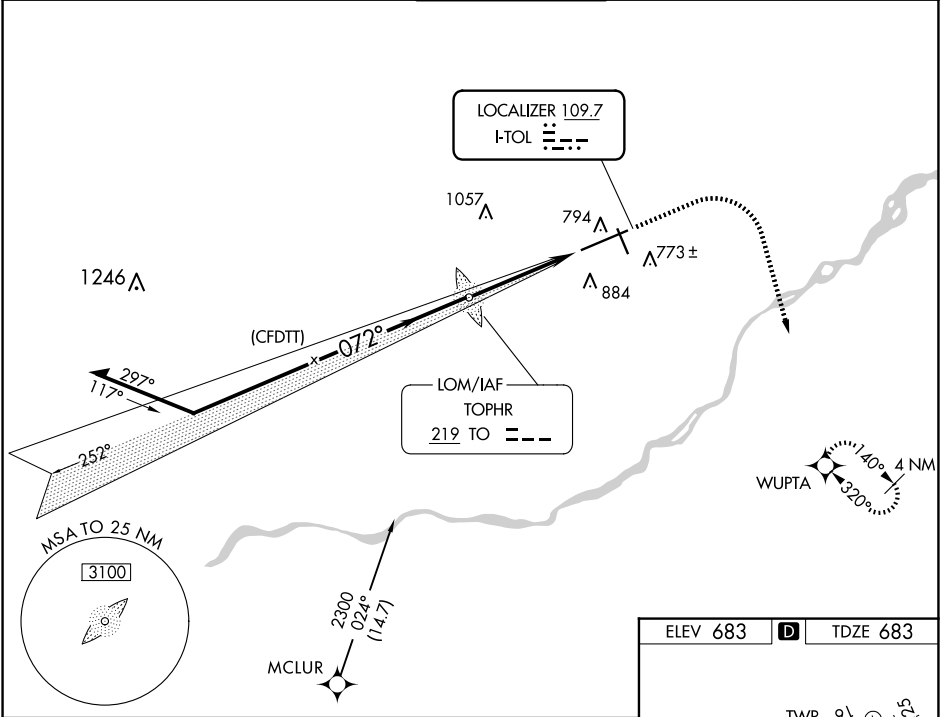

CATEGORY	A	B	C	D	E
S-ILS 7	883/18 200 (200-1/2)				
S-LOC 7	1140/24 457 (500-1/2)	1140/45 457 (500-7/8)			
CIRCLING	1200-1 517 (600-1)	1300-1 3/4 617 (700-1 3/4)	1360-2 1/4 677 (700-2 1/4)	1360-2 1/2 677 (700-2 1/2)	
FAF to MAP 4.4 NM					
Knots 60 90 120 150 180 Min:Sec 4:24 2:56 2:12 1:46 1:28					