

|             |         |              |     |
|-------------|---------|--------------|-----|
| VOR/DME HFD | APP CRS | Rwy Ldg TDZE | N/A |
| 114.9       | 334°    |              | N/A |
| Chan 96     |         | Apt Elev     | 18  |

VOR-A



HARTFORD-BRAINARD (HF'D)


- ▼

Helicopter visibility reduction below 1 SM NA. When Rwy 2 VGSi inop, Circling to Rwy 2 NA at night. Circling to Rwy 11 and 29 NA at night.
- ▲

When Rwy 20 VGSi Inop, Circling to Rwy 20 NA at night.
- MISSED APPROACH: Climbing right turn to 2500 on heading 100° and PUT VOR/DME R-265 to RAMBO INT and hold.

|        |                 |                      |         |        |
|--------|-----------------|----------------------|---------|--------|
| ATIS   | BRADLEY APP CON | BRAINARD TOWER ★     | GND CON | UNICOM |
| 126.45 | 127.8 269.325   | 119.6 (CTAF) 0 248.2 | 121.6   | 122.95 |

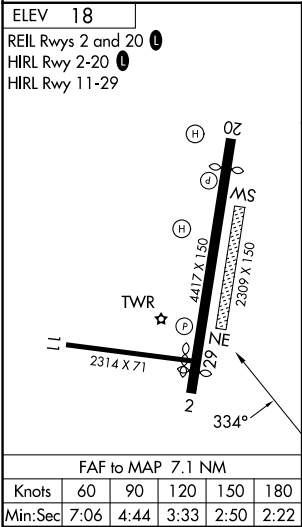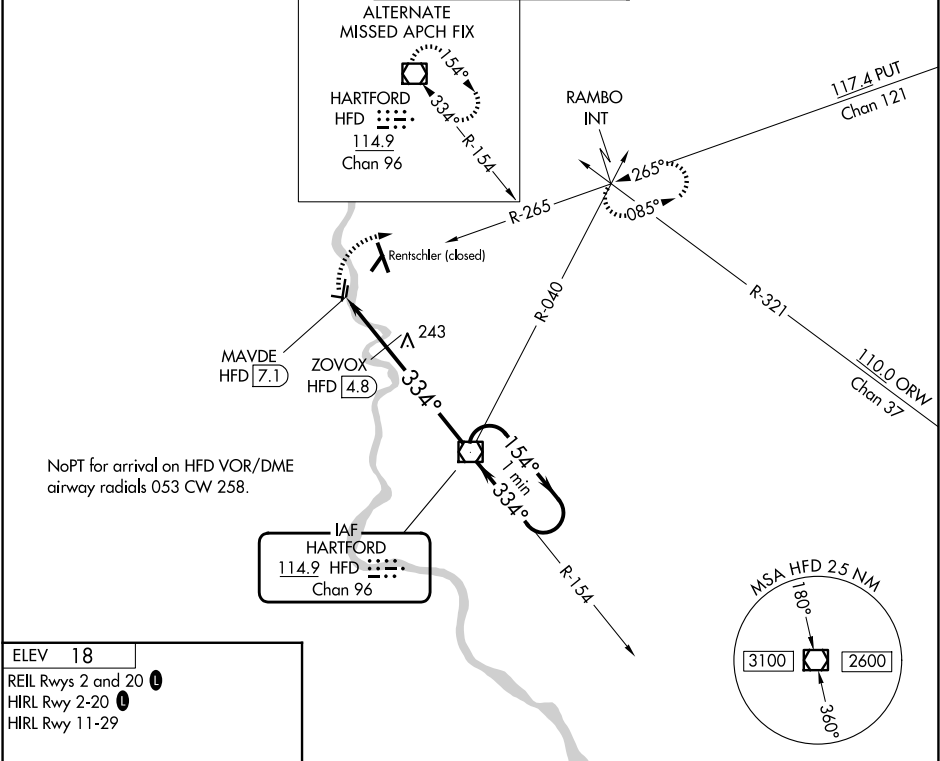

|                                                                                             |                           |                  |                           |                                                                                     |                         |                               |                       |
|---------------------------------------------------------------------------------------------|---------------------------|------------------|---------------------------|-------------------------------------------------------------------------------------|-------------------------|-------------------------------|-----------------------|
| 2500<br> |                           | PUT<br>R-265     | RAMBO<br>INT              | HFD<br>VOR/DME                                                                      |                         | One Minute<br>Holding Pattern |                       |
|                                                                                             |                           | ZOVOX<br>HFD 4.8 |                           |  |                         | 2500                          |                       |
|                                                                                             |                           | MAVDE<br>HFD 7.1 |                           |                                                                                     |                         |                               |                       |
|                                                                                             |                           | 1200             |                           |                                                                                     |                         |                               |                       |
|                                                                                             |                           | 2.3 NM           |                           | 4.8 NM                                                                              |                         |                               |                       |
| CATEGORY                                                                                    | A                         |                  | B                         |                                                                                     | C                       |                               | D                     |
| CIRCLING                                                                                    | 1200-1¼<br>1182 (1200-1¼) |                  | 1200-1½<br>1182 (1200-1½) |                                                                                     | 1200-3                  |                               | 1182 (1200-3)         |
| ZOVOX FIX MINIMUMS (DME REQUIRED)                                                           |                           |                  |                           |                                                                                     |                         |                               |                       |
| CIRCLING                                                                                    | 580-1<br>562 (600-1)      |                  | 900-1¼<br>882 (900-1¼)    |                                                                                     | 920-2¾<br>902 (1000-2¾) |                               | 920-3<br>902 (1000-3) |