

WAAS

CH **48802**

W05A

APP CRS

051°

Rwy Ldg

9508

TDZE

953

Apt Elev

986

RNAV (GPS) RWY 5L

MC GHEE TYSON (T'YS)

RNP APCH - GPS.

T

A


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

A5

MISSED APPROACH: Climb to 1500 then climb to 4000 direct VXV VORTAC and hold, continue climb-in-hold to 4000.

ATIS 128.35	KNOXVILLE APP CON 123.9 360.8	KNOXVILLE TOWER 121.2 257.8	GND CON 121.9 348.6	CLNC DEL 121.65
-----------------------	---	---------------------------------------	-------------------------------	---------------------------

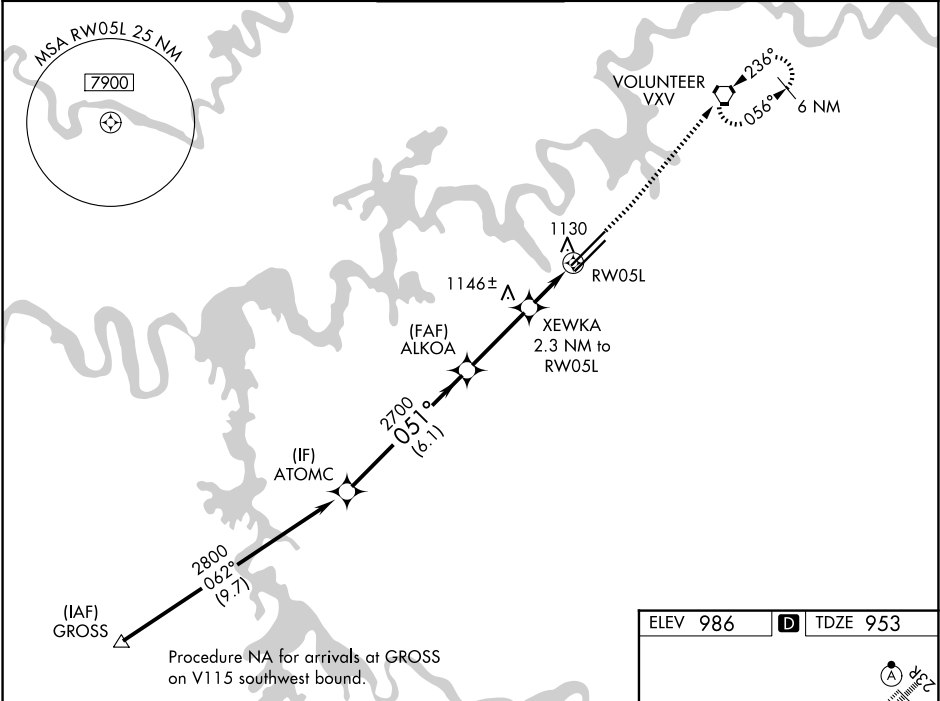

ATOMC

2800

051°

2700

1700

GP 3.00°

TCH 55

ALKOA

2700

1.2 NM to RW05L

XEWKA

2.3 NM to RW05L

RW05L

1130

CATEGORY	A	B	C	D
LPV DA*	1153/24		200 (200-½)	
LNAV/VNAV DA	1291/26		338 (400-½)	
LNAV MDA	1380/24	427 (400-½)	1380/40	427 (400-¾)
CIRCLING	1500-1 514 (600-1)	1560-1 574 (600-1)	1660-2 674 (700-2)	1900-3 914 (1000-3)

1500

4000

VXV

10000 X 1.50

9000 X 1.50

0.8% UP

0.5% UP

0.4% DOWN

ELEV 986

TDZE 953

TWR

051°

HIRL Rwy 5L-23R and 5R-23L

REIL Rwy 5R and 23L

TDZ/CL Rwy 5R and 23R