

LAS VEGAS, NEVADA

ILS or LOC X RWY 21L

LOC I-DIQ	APCH CRS	Rwy Idg	21L	21R
109.1	209°	TDZE	10,051	10,120
		Arpt Elev	1865	1869

(USAF)

NELLIS AFB (KLSV)

DME or RADAR required.

- ▼ * When ALS inop, increase RVR to 40, vis to 3/4 mile.
** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1 3/8 miles.
*** Circling not authorized SE of Rwy 3R-21L.



MISSED APPROACH: Climb to 15,000, intercept LSV TACAN R-210 to 2.5 DME (ROCKX), then climbing right turn heading 043° to intercept LSV R-358 to ARCOE and hold, climb in hold to 15,000. Missed approach not for civil use.




ATIS	APP CON	TOWER	GND CON	CLNC DEL*
270.1	124.95 273.55	132.55 327.0	121.8 275.8	120.9 289.4

Knots	60	120	180	240	300	360
V/V(fpm)	372	744	1116	1488	1860	2232
Min climb of 372 ft/NM to 9400 - Controlling obstacle 5739						

CAUTION: Missed approach with 200 ft/NM climb gradient not available.

MISSED APPROACH requires use of RNAV or ATC RADAR monitoring.

Minimum NAVAID reception at ARCOE 15,000 MSL.

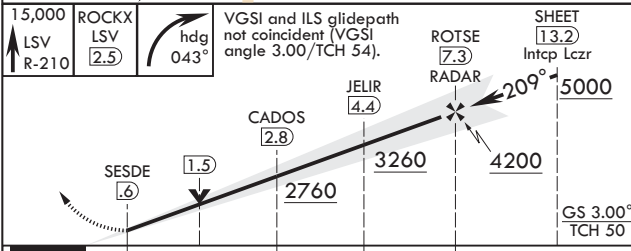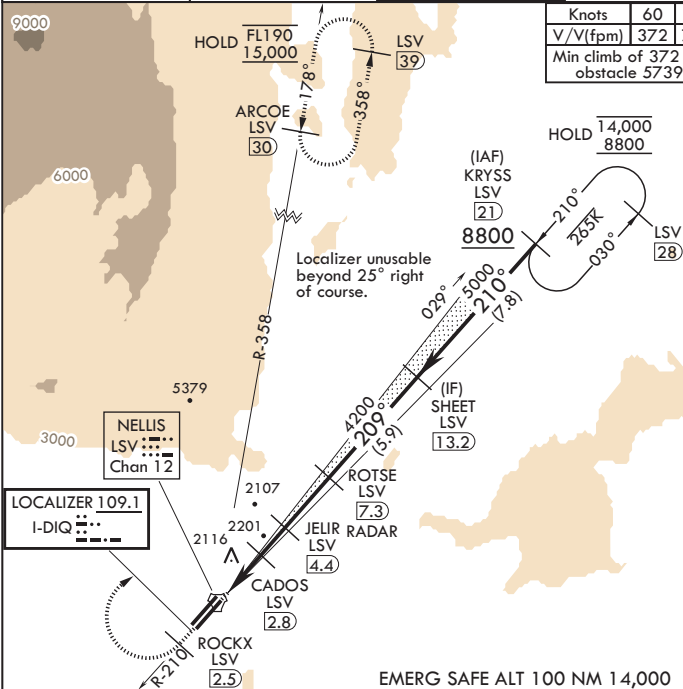

ELEV 1869	TDZE 21L 1865
	TDZE 21R 1869

