

WAAS
CH **70709**
W35D

APP CRS
350°

Rwy Ldg
TDZE
Apt Elev

7800
479
501

RNAV (GPS) Y RWY 35R
LOUISVILLE MUHAMMAD ALI INTL (SDF)



RNP APCH - GPS.

▼ Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.
▲ Use of FD or AP required during simultaneous operations. Circling Rwy 11 NA at night.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C.

ALSF-2

MISSED APPROACH:
Climb to 1600 then climbing
right turn to 4000 direct
TORAC and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
--------------------------	--	--	-------------------------------

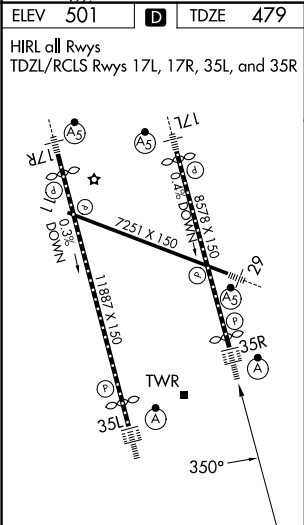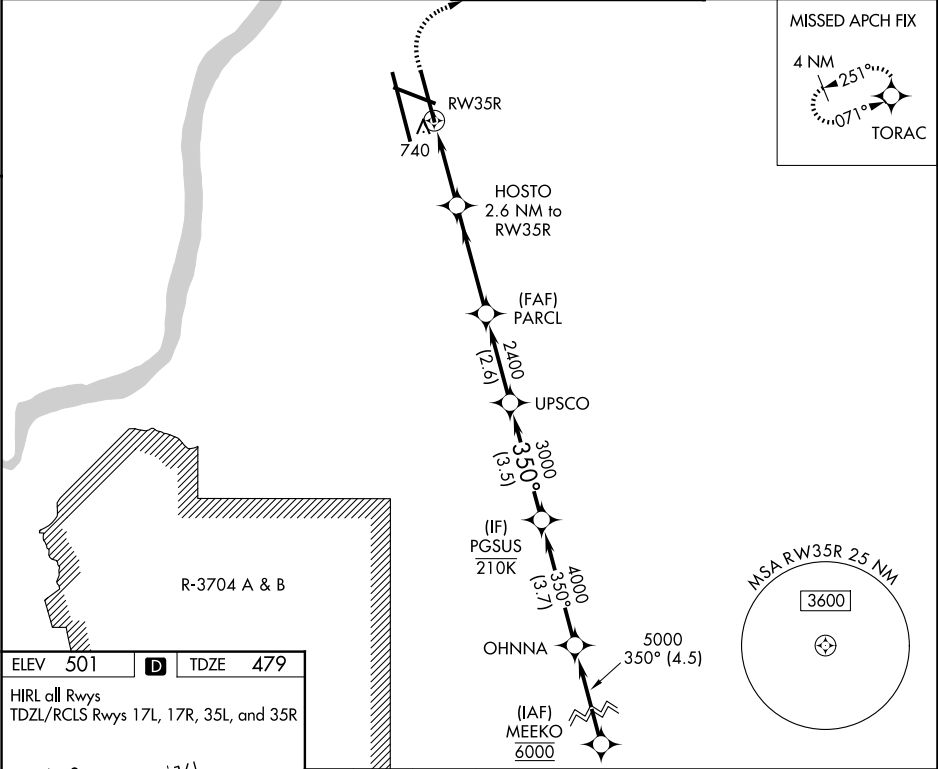

1600 4000 TORAC

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 71).

PGSUS 4000

350°

3000

2400

1360

1.4 NM to RW35R

2.6 NM to RW35R

3.3 NM

2.6 NM

3.5 NM

GP 3.00° TCH 60

CATEGORY	A	B	C	D
LPV DA		679/18	200 (200-½)	
LNAV/VNAV DA		901/40	422 (400-¾)	
LNAV MDA	1000/24	521 (500-½)	1000/55	521 (500-1)
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)