

LOC/DME I-DSZ
110.1
Chan **38**

APP CRS
185°

Rwy Ldg
TDZE **864**
Apt Elev **887**

ILS or LOC RWY 18

DANE COUNTY RGNL/TRUAX FLD (MSN)

DME or RADAR required.


▼

For inop ALS, increase S-ILS 18 Cat E visibility to RVR 4000 and S-LOC 18 Cat C/D/E visibility to RVR 5500.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2700 on MSN VORTAC R-180 to MONAH INT/ MSN VORTAC 4.9 DME/RADAR and hold.

ATIS 124.65 278.3	MADISON APP CON ★ 135.45 343.7	MADISON TOWER ★ 119.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	--	--	-------------------------------	-------------------------

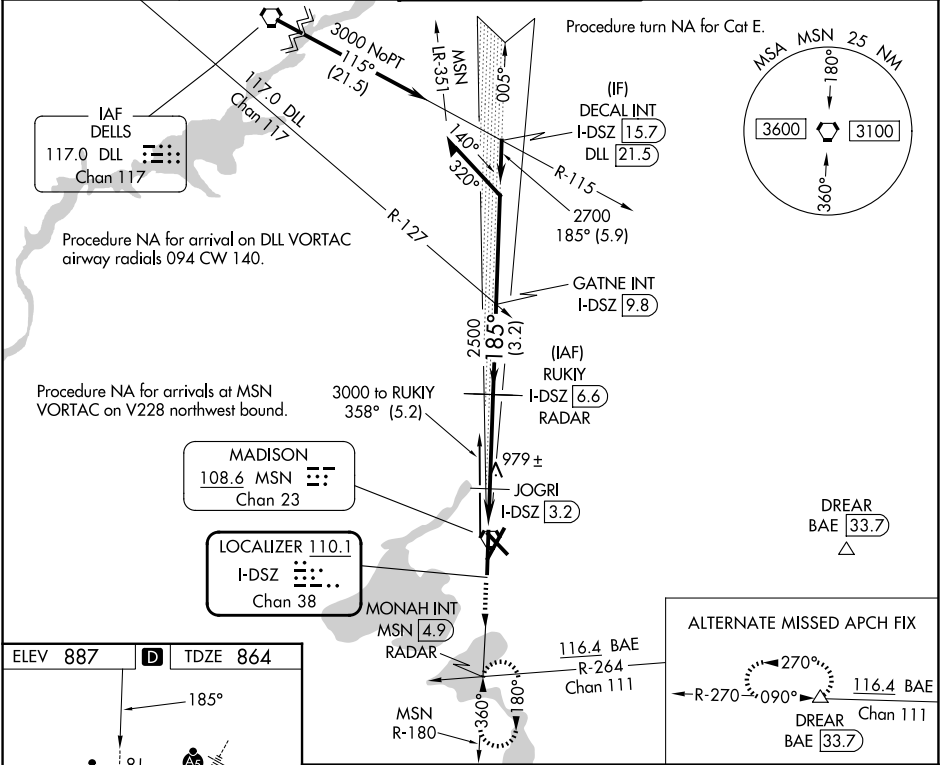

ELEV 887

D

TDZE 864

HIRL all Rwy 3

REIL Rwy 3, 14 and 32

2700

MSN R-180

MONAH INT

RUKY I-DSZ 6.6 RADAR

JOGRI I-DSZ 3.2

GATNE INT I-DSZ 9.8

2500

2800

1420

2500

185°

005°

Remain within 10 NM

GS 3.00° TCH 57

CATEGORY	A	B	C	D	E
S-ILS 18 *	1064/24 200 (200-1/2)				
S-LOC 18	1240/24	376 (400-1/2)	1240/35	376 (400-5/8)	
CIRCLING	1420-1 533 (600-1)	1460-1 573 (600-1)	1460-1 1/2 573 (600-1 1/2)	1700-2 3/4 813 (900-2 3/4)	1700-3 813 (900-3)