

WAAS CH 42829 W21A	APP CRS 212°	Rwy Ldg 7015 TDZE 887 Apt Elev 887
--	------------------------	---



RNAV (GPS) RWY 21
DANE COUNTY RGNL/TRUAX FLD (MSN)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1¾ mile and LNAV Cat C/D visibility to 1½ mile.

MALSR

MISSED APPROACH:
Climb to 3600 direct
WIROD and hold.

ATIS 124.65 278.3	MADISON APP CON★ 135.45 343.7	MADISON TOWER★ 119.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
----------------------	----------------------------------	--	------------------------	------------------

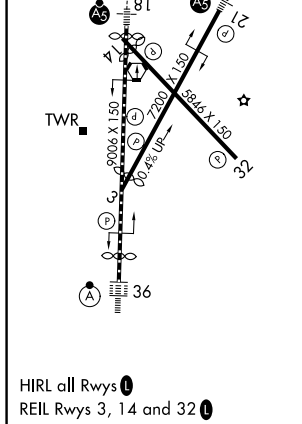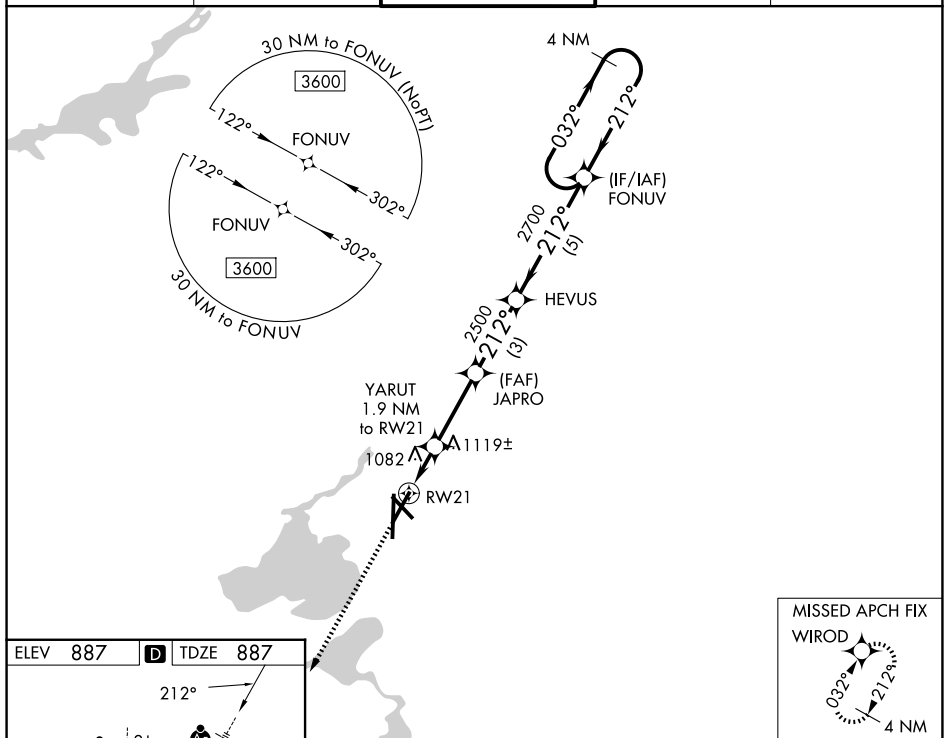

3600		WIROD		* LNAV only		FONUV		4 NM Holding Pattern	
				YARUT 1.9 NM to RW21		JAPRO 2500		HEVUS	
		* 1.4 NM to RW21		* 1540		2500		212°	
		1.4 NM		0.5		3 NM		3 NM	
CATEGORY		A		B		C		D	
LPV DA		1087-1½		200 (200-½)					
LNAV/VNAV DA		1412-1¾		525 (600-1¾)					
LNAV MDA		1380-½		493 (500-½)		1380-1		493 (500-1)	
CIRCLING		1420-1 533 (600-1)		1460-1 573 (600-1)		1460-1½ 573 (600-1½)		1700-2¾ 813 (900-2¾)	