

LOC/DME I-RRU 111.3 Chan 50	APP CRS 269°	Rwy Ldg TDZE 862 Apt Elev 869	ILS or LOC RWY 27 THE EASTERN IOWA (CID)
---	------------------------	---	---

⚠ VDP NA with Iowa City alimeter setting. Autopilot coupled approach NA below 1910.


⚠ When local alimeter setting not received, use Iowa City alimeter setting: increase DA to 1126 feet; increase all MDA 80 feet, increase S-LOC Cat C and D visibility to RVR 5000, and Circling Cat C and D visibility ¼ SM.

#RVR 1800 authorized with use of FD or HUD to DA (NA when using Iowa City alimeter setting).

MALSR

MISSED APPROACH: Climb to 2900 direct CID VOR/DME and hold, continue climb-in-hold to 2900.

ATIS 124.15	CEDAR RAPIDS APP CON ★ 119.7 266.8	CEDAR RAPIDS TOWER ★ 118.7 (CTAF) 0 266.8	GND CON 121.6	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

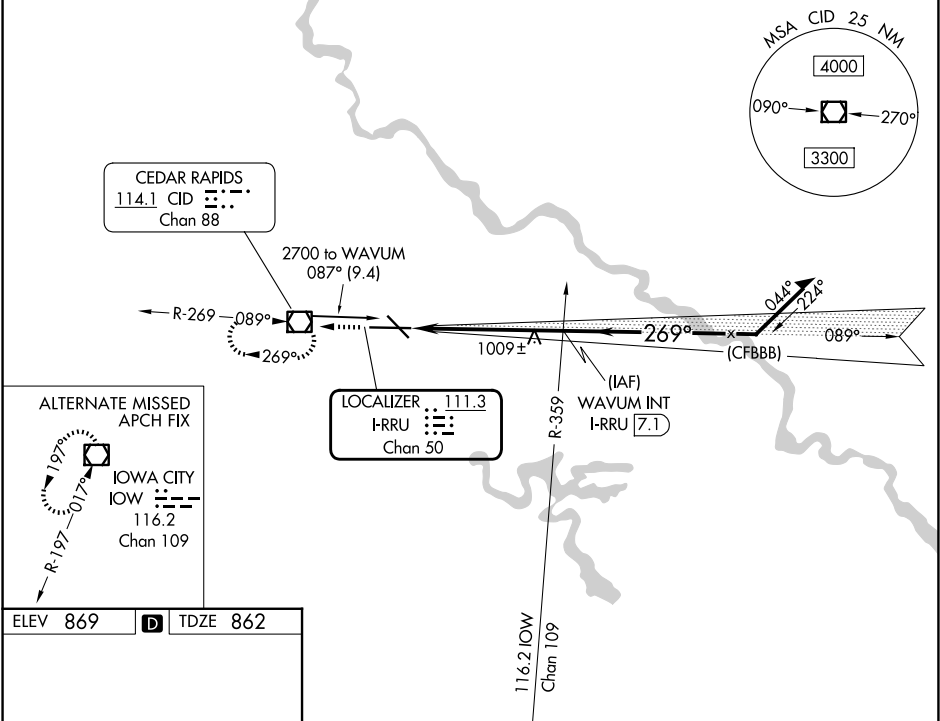

ELEV 869	D	TDZE 862
-----------------	----------	-----------------

