


WAAS CH 56201 W27B	APP CRS 274°	Rwy Ldg TDZE Apt Elev	9482 26 33
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 27L
MELBOURNE ORLANDO INTL (MLB)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2000 direct SUROY and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV ▲ NA below 2°C or above 54°C.	

ATIS 132.55	ORLANDO APP CON 126.025 281.425	MELBOURNE TOWER ★ 118.2 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

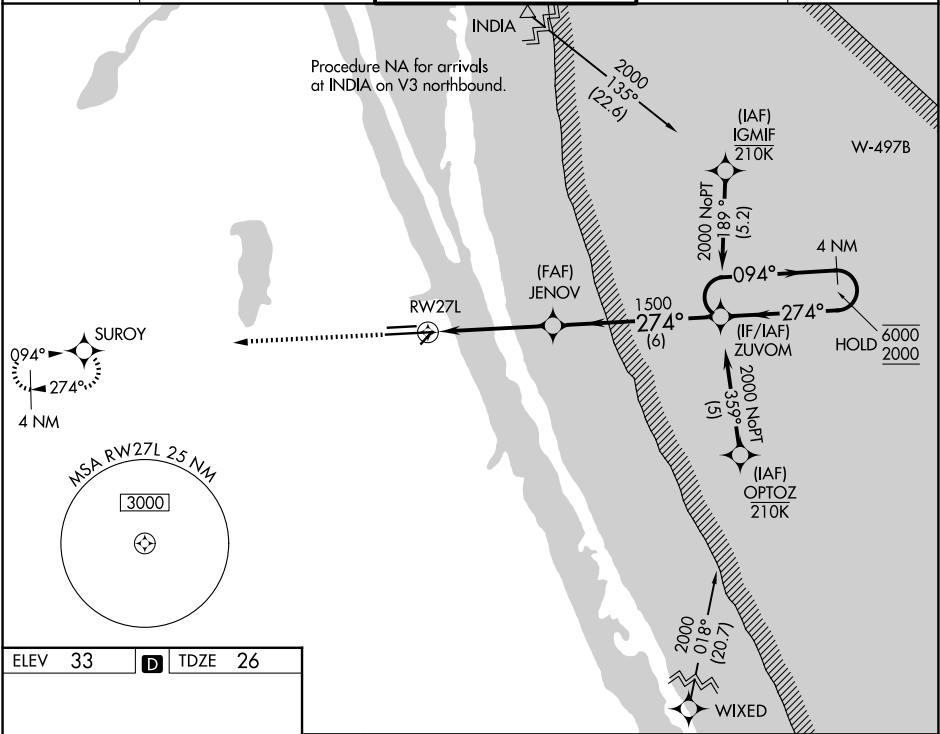

ELEV 33	D	TDZE 26
---------	----------	---------

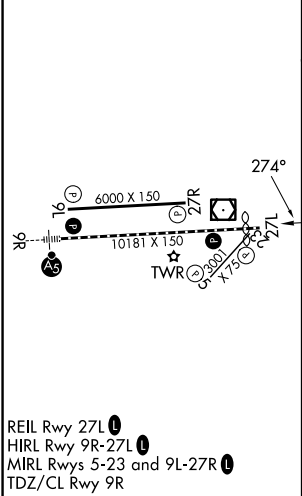

2000 ↑	SUROY ✦				
CATEGORY	A	B	C	D	
LPV DA	226-¾		200 (200-¾)		
LNAV/ VNAV	318-¾		292 (300-¾)		
LNAV MDA	500-1 474 (500-1)		500-1¾ 474 (500-1¾)		
CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-1¾ 647 (700-1¾)	880-2¾ 847 (900-2¾)	