

VOR/DME	MLB	Rwy Ldg	10181
115.85	APP CRS	TDZE	32
Chan 105(Y)	089°	Apt Elev	33

VOR RWY 9R



MELBOURNE ORLANDO INTL (MLB)

JEMDO FIX minimums: For inop MALSR, increase S-9R Cats C and D visibility to RVR 6000.




MISSED APPROACH: Climb to 1000, then climbing left turn to 2100 direct MLB VOR/DME and hold, continue climb-In-hold to 2100.

ATIS	ORLANDO APP CON	MELBOURNE TOWER ★	GND CON	UNICOM
132.55	126.025 281.425	118.2(CTAF) 257.8	121.9	122.95

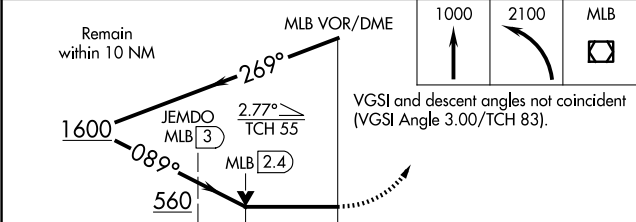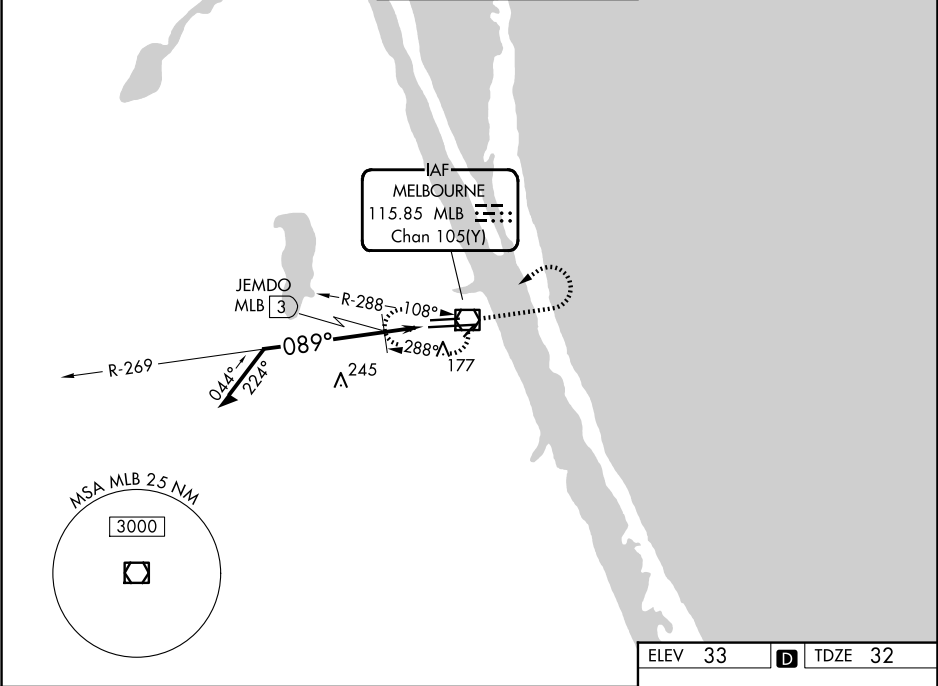

CATEGORY	A	B	C	D
S-9R	560/24	528 (600-½)	560/55	528 (600-1)
CIRCLING	560-1	527 (600-1)	680-1¾ 647 (700-1¾)	880-2¾ 847 (900-2¾)
JEMDO FIX MINIMUMS				
S-9R	440/24	408 (500-½)	440/40	408 (500-¾)
CIRCLING	560-1	527 (600-1)	680-1¾ 647 (700-1¾)	880-2¾ 847 (900-2¾)

ELEV 33	TDZE 32
---------	---------



REIL Rwy 27L
HIRL Rwy 9R-27L
MIRL Rwy 5-23 and 9L-27R
TDZ/CL Rwy 9R