

ILS or LOC RWY 18R
MEMPHIS INTL (MEM)

LOC I-001 109.9	APP CRS 180°	Rwy Ldg 9320 TDZE 295 Apt Elev 341
---------------------------	------------------------	---

Radars required for procedure entry, DME or RADAR required.


Simultaneous approach authorized. For inop ALS, increase S-ILS 18R Cat E visibility to RVR 4000, S-LOC 18R Cat E visibility to 2 SM, SAAMM fix minimums. increase S-LOC 18R Cat E visibility to 1½ SM.

MALS®

MISSED APPROACH: Climb to 900 then climbing right turn to 5000 on MEM VORTAC R-212 to JEPOB INT/UIM 20 DME and hold

MEMPHIS APP CON			MEMPHIS TOWER		GND CON	
119.1	291.6	(176°-355°)	(Rwy 9-27)	118.3 257.8	(Rwy 9-27)	121.0 379.2
125.8	338.3	(356°-175°)	(Rwys 18C-36C, 18L-36R)	119.7 257.8	(Rwys 18C-36C, 18L-36R)	121.9 379.2
			(Rwy 18R-36L)	128.425 257.8	(Rwy 18R-36L)	121.65 379.2

D-ATIS
127.75

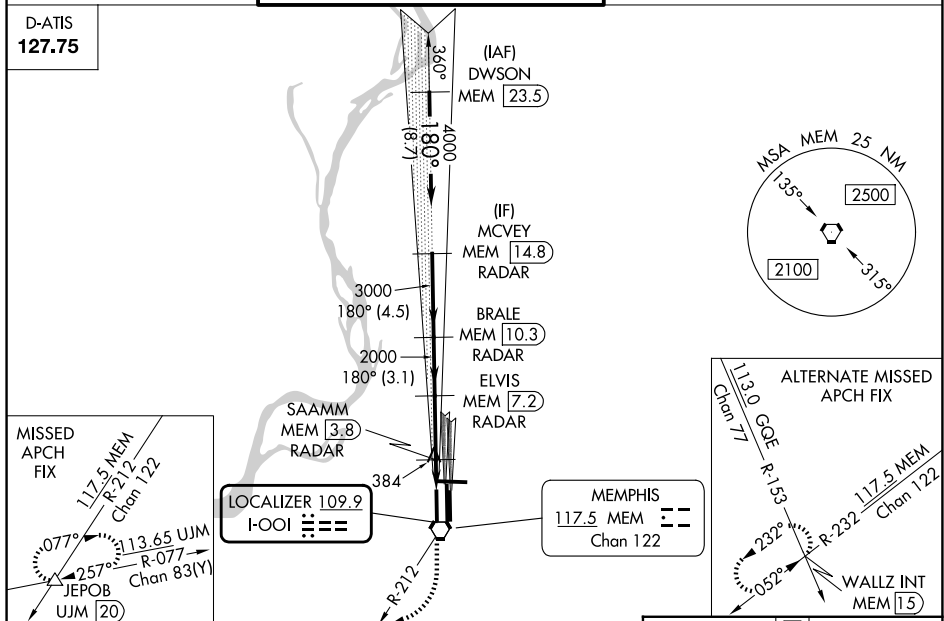

Minimum Altitudes by Category

Category	A	B	C	D	E
S-ILS 18R	495/18 200 (200-½)				495/24 200 (200-½)
S-LOC 18R	840/24 545 (500-½)		840/50 545 (500-1)	840/60 545 (500-1¼)	840-1½ 545 (500-1½)
CIRCLING	940-1 599 (600-1)		940-1½ 599 (600-1½)	1020-2¼ 679 (700-2¼)	1140-2¾ 799 (800-2¾)

SAAMM FIX MINIMUMS (DME OR RADAR REQUIRED)

Category	A	B	C	D	E
S-LOC 18R	700/24 405 (400-½)		700/40 405 (400-¾)		700/50 405 (400-1)
CIRCLING	940-1 599 (600-1)		940-1½ 599 (600-1½)	1020-2¼ 679 (700-2¼)	1140-2¾ 799 (800-2¾)

MEMPHIS INTL (MEM)
ILS or LOC RWY 18R