

LOC/DME I-MYO 111.35 Chan 50(Y)	APP CRS 360°	Rwy Ldg TDZE 335 Apt Elev 341
--	------------------------	---

ILS or LOC RWY 36R

MEMPHIS INTL (MEM)

⚠

For inoperative ALSF, increase S-ILS 36R Cat E visibility to RVR 4000 and S-LOC 36R Cat E visibility to 1½. Simultaneous approach authorized with Rwy 36L. DME or RADAR required.

ALSF-2


MISSED APPROACH:

Climb to 1000 then climbing right turn to 5000 via heading 070° and MEM VORTAC R-040 to OROCU INT/MEM VORTAC 15 DME and hold, continue climb-in-hold to 5000.


MEMPHIS APP CON	MEMPHIS TOWER	GND CON
119.1 291.6 (176°-355°)	(Rwy 9-27) 118.3 257.8	(Rwy 9-27) 121.0 379.2
125.8 338.3 (356°-175°)	(Rwys 18C-36C, 18L-36R) 119.7 257.8	(Rwys 18C-36C, 18L-36R) 121.9 379.2
	(Rwy 18R-36L) 128.425 257.8	(Rwy 18R-36L) 121.65 379.2

D-ATIS
127.75

RADAR REQUIRED

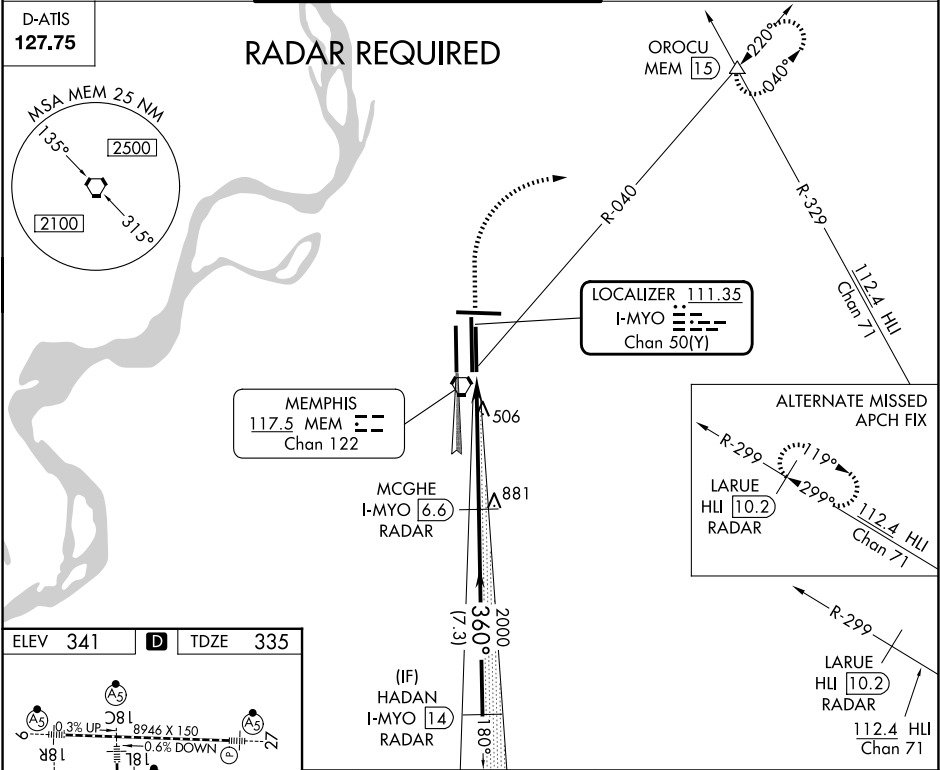

ELEV 341	D	TDZE 335
----------	----------	----------

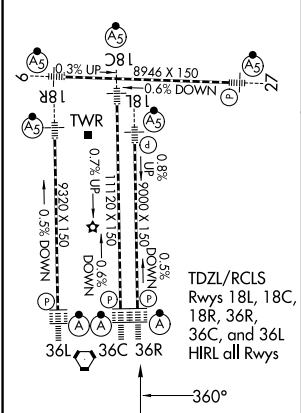

FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

1000	5000	MEM R-040	OROCU	MCGHE I-MYO RADAR 2000	HADAN I-MYO RADAR 14
↑	hdg 070°				
VGSi and ILS glidepath not coincident (VGSi Angle 3.00/ TCH 69°).					
1.2 NM 3.8 NM 7.3 NM					
CATEGORY	A	B	C	D	E
S-ILS 36R	535/18 200 (200-½)				535/24 200 (200-½)
S-LOC 36R	760/24	425 (500-½)	760/40	425 (500-¾)	760/50 425 (500-1)
CIRCLING	940-1	599 (600-1)	940-1½ 599 (600-1½)	1020-2¼ 679 (700-2¼)	1140-2¾ 799 (800-2¾)

SE-1, 25 DEC 2025 to 22 JAN 2026

SE-1, 25 DEC 2025 to 22 JAN 2026