

WAAS CH 45525 W12B	APP CRS 121°	Rwy Ldg TDZE Apt Elev	7620 841 842
--	------------------------	-----------------------------	---

RNAV (GPS) Z RWY 12L


MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 12R. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. DME/DME RNP-0.3 NA. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1 1/2 SM, LNAV Cats C/D/E visibility to RVR 6000.

ALSf-2

MISSED APPROACH:
Climb to 1300, then climbing left turn to 3000 direct KANAC and hold.

ATIS 135.35 239.275	MINNEAPOLIS APP CON 118.725 335.65 (35) 119.3 335.65 (12L-30R, 4-22, 17) 126.95 335.65 (12R-30L)	MINNEAPOLIS TOWER 123.675 273.55 (17-35) 123.95 273.55 (12L-30R) 126.7 273.55 (12R-30L, 4-22)	GND CON 121.8 348.6 (N) 121.9 348.6 (S) 127.925 348.6 (W)
-------------------------------	--	---	---

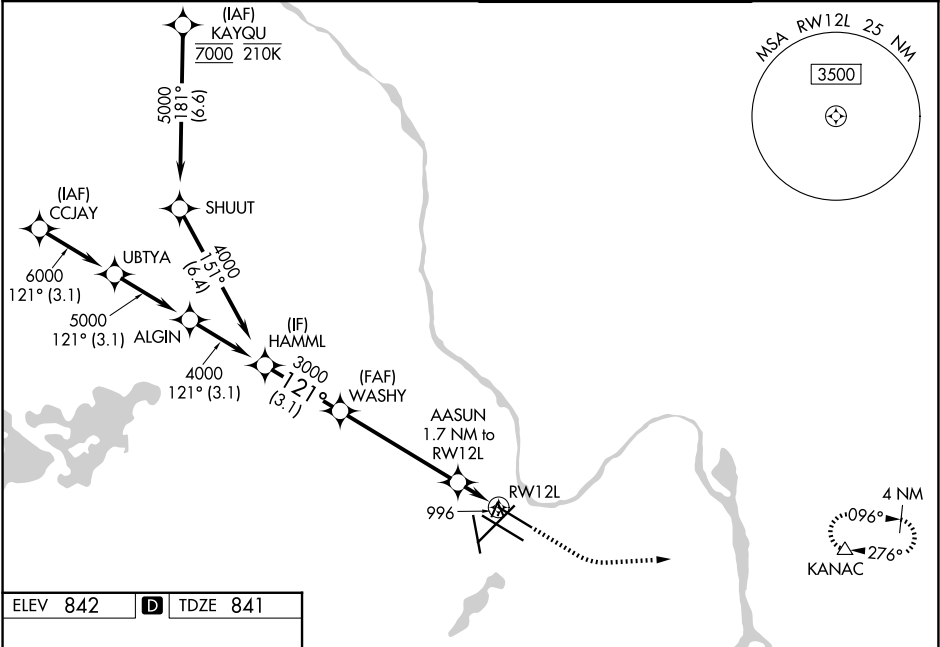

ELEV 842 **D** TDZE 841

HIRL all Rwys
REIL Rwy 17
TDZ/CL Rwys 12L, 12R, 30L, and 35

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 79°).

1300 3000 KANAC

*LNNAV only

GP 3.00° TCH 52

4000 3000 1420

3.1 NM 4.9 NM 0.6 NM 1.1 NM

CATEGORY	A	B	C	D	E
LPV DA	1041/18 200 (200-1/2)				
LNAV/VNAV DA	1211/40 370 (400-3/4)				
LNAV MDA	1260/24	419 (500-1/2)	1260/40	419 (500-3/4)	
CIRCLING	1360-1	518 (600-1)	1460-1 3/4 618 (700-1 3/4)	1660-2 3/4 818 (900-2 3/4)	1800-3 958 (1000-3)

NC-1, 25 DEC 2025 to 22 JAN 2026

NC-1, 25 DEC 2025 to 22 JAN 2026