
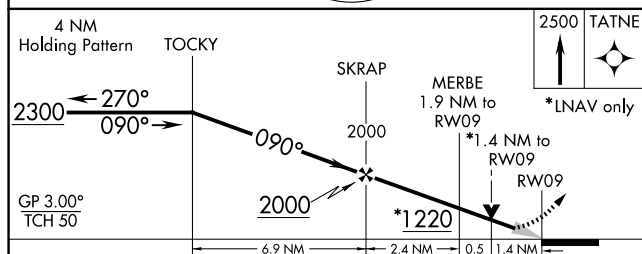


|                                        |                        |                                                                |
|----------------------------------------|------------------------|----------------------------------------------------------------|
| WAAS<br>CH <b>61123</b><br><b>W09A</b> | APP CRS<br><b>090°</b> | Rwy Ldg <b>10002</b><br>TDZE <b>587</b><br>Apt Elev <b>590</b> |
|----------------------------------------|------------------------|----------------------------------------------------------------|

RNAV (GPS) RWY 9  
QUAD CITIES INTL (MLI)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                       |                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| <p><b>⚠</b> Circling to Rwy 5 NA at night. Baro-VNAV NA when using Davenport altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 40°C (104°F). DME/DME RNP-0.3 NA. VDP NA when using Davenport altimeter setting. When local altimeter setting not received, use Davenport altimeter setting and increase LPV DA to 825 feet and LNAV/VNAV DA to 1160 feet and LNAV/VNAV visibility all Cats ½ SM; increase all MDA 60 feet and LNAV visibility Cats C and D ½ SM, Circling Cats C and D ½ SM. For inoperative ALS, increase LNAV visibility Cats C and D to 1 ½ SM. When using Davenport altimeter increase LNAV/VNAV visibility all Cats to 2 SM, LNAV visibility Cats C and D to 1 ½ SM.</p> <p><b>** RVR 1800 authorized with use of FD or AP or HUD to DA.</b></p> | <p><b>MALSR</b></p>  | <p><b>MISSED APPROACH:</b><br/>Climb to 2500 direct TATNE and hold.</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|

|               |                                     |                                            |                  |                  |
|---------------|-------------------------------------|--------------------------------------------|------------------|------------------|
| ATIS<br>121.2 | QUAD CITY APP CON ★<br>125.95 257.8 | QUAD CITY TOWER ★<br>119.4 (CTAF) 0 269.55 | GND CON<br>121.9 | UNICOM<br>122.95 |
|---------------|-------------------------------------|--------------------------------------------|------------------|------------------|

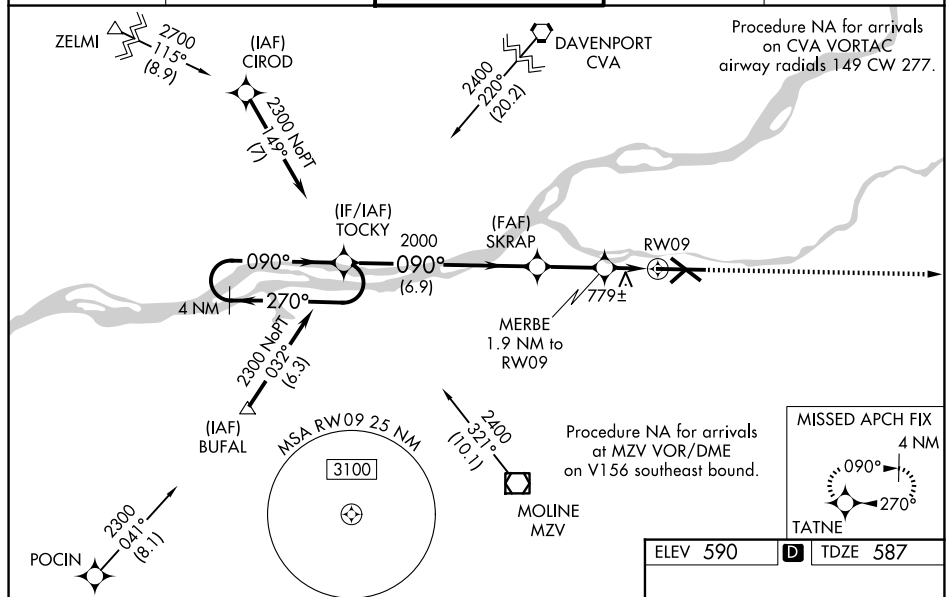

| CATEGORY         | A                      | B                      | C                      | D                        |
|------------------|------------------------|------------------------|------------------------|--------------------------|
| LPV DA **        | 787/24 200 (200-½)     |                        |                        |                          |
| LNAV/<br>VNAV DA | 1 122-1⅜ 535 (600-1⅜)  |                        |                        |                          |
| LNAV MDA         | 1 060/24 473 (500-½)   |                        | 1 060/50 473 (500-1)   |                          |
| CIRCLING         | 1 140-1<br>550 (600-1) | 1 200-1<br>610 (700-1) | 1 320-2<br>730 (800-2) | 1 420-2¾<br>830 (900-2¾) |