

LOC I-MZR
109.5

APP CRS
222°

Rwy Ldg **7504**
TDZE **78**
Apt Elev **79**

ILS or LOC RWY 22
MONROE RGNL (MLU)

DME or RADAR required for procedure entry.

▼

▲


ASR

Circling Rwy 14 NA at night. For inop ALS, increase S-LOC 22 Cat C/D visibility to 1½ SM.
DME from MLU VORTAC.

MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold, continue climb-in-hold to 3000.

ATIS 125.05	MONROE APP CON ★ 118.15 290.475	MONROE TOWER ★ 118.9 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

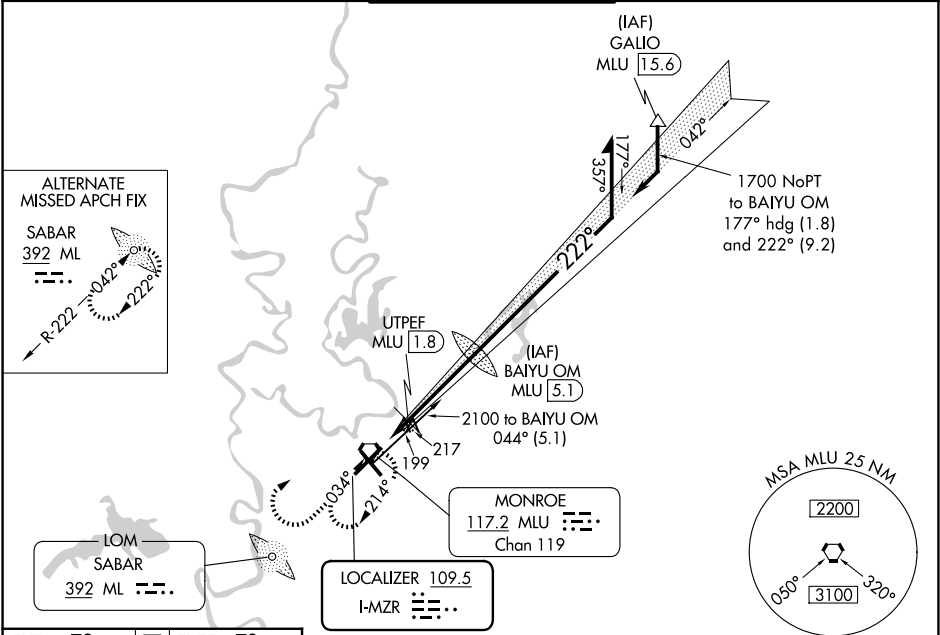

ELEV 79 **D** TDZE 78

REIL Rws 14 and 32
MIRL Rwy 14-32
HIRL Rwy 4-22

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

CATEGORY	A	B	C	D
S-ILS 22	278-½ 200 (200-½)			
S-LOC 22	560-½	482 (500-½)	560-1	482 (500-1)
CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)
# UTEF FIX MINIMUMS				
S-LOC 22	500-½	422 (500-½)	500-¾	422 (500-¾)
CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)