

LOC I-MLU	APP CRS	Rwy Ldg	7504
109.5	042°	TDZE	78
		Apt Elev	79

ILS or LOC RWY 4
MONROE RGNL (MLU)

ADF or DME required for procedure entry.

⚠ Circling Rwy 14 NA at night. For inop ALS, increase S-LOC 4 Cat C/D visibility to 1½ SM.
⚠ UXGOY FIX MINIMUMS: For inop ALS, increase S-LOC 4 Cat C/D visibility to RVR 5500.
ASR **RVR 1800 authorized with the use of FD or AP or HUD to DA.
DME from MLU VORTAC.



MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold.

ATIS	MONROE APP CON *	MONROE TOWER *	GND CON	UNICOM
125.05	118.15 290.475	118.9(CTAF) 0 257.8	121.9	122.95



ALTERNATE MISSED APCH FIX

SABAR
MLU 5.1
ML 392

MSA ML LOM 25 NM

MONROE
117.2 MLU
Chan 119

LOCALIZER 109.5
I-MLU

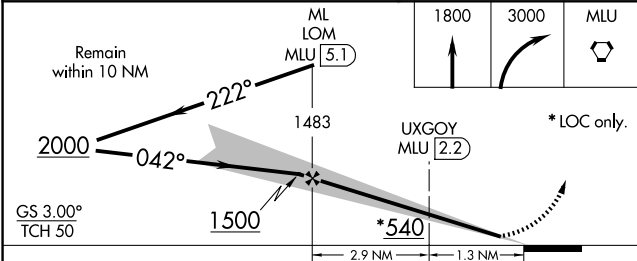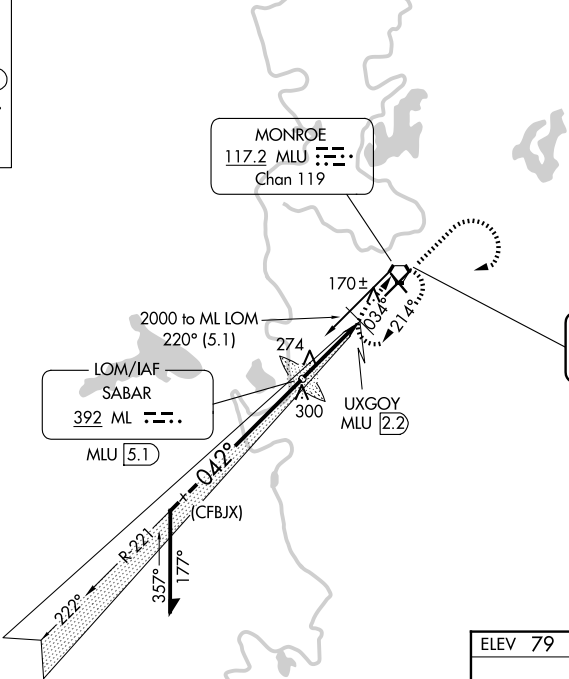

CATEGORY	A	B	C	D
S-ILS 4	**278/24 200 (200-½)			
S-LOC 4	540/24	462 (500-½)	540/50	462 (500-1)
CIRCLING	580-1	501 (600-1)	740-1¾ 661(700-1¾)	1160-3 1081 (1100-3)
# UXGOY FIX MINIMUMS				
S-LOC 4	420/24	342 (400-½)	420/30	342 (400-¾)
CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)

ELEV 79 D TDZE 78

REIL Rws 14 and 32
MIRL Rwy 14-32
HIRL Rwy 4-22

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

SC-4, 25 DEC 2025 to 22 JAN 2026

SC-4, 25 DEC 2025 to 22 JAN 2026