

WAAS CH 40313 W01B	APP CRS 006°	Rwy Ldg 5930 TDZE 17 Apt Elev 36
--	------------------------	---

RNAV (GPS) Z RWY 1L

NAPA COUNTY (APC)

RNP APCH-GPS.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Inop table does not apply to LPV minimums. For inop ALS, increase visibility LNAV/VNAV to 7/5 SM. Missed approach requires minimum climb of 420 feet per NM to 2200. If unable to meet climb gradient see RNAV (GPS) Y RWY 1L.


MALS

4

2


MISSED APPROACH: Climb to 5000 direct CIVDA and on track 326° to POPES and hold, continue climb-in-hold to 5000.

ATIS 124.05	OAKLAND CENTER 127.8 353.5	NAPA TOWER★ 118.7 0 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
-----------------------	--------------------------------------	--	-------------------------	-------------------------

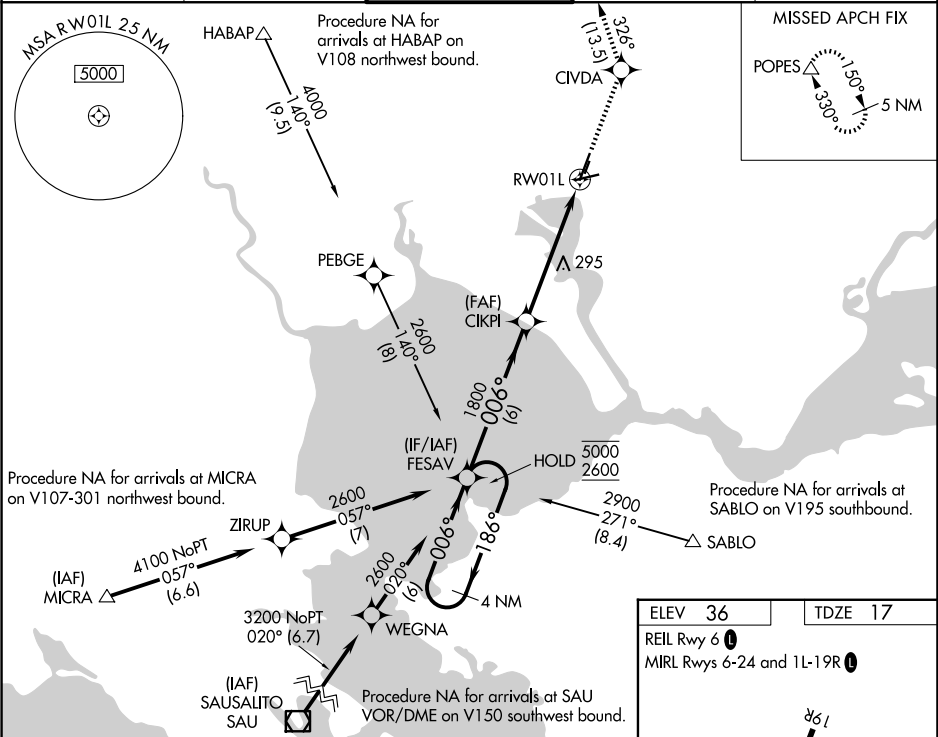

ELEV 36	TDZE 17
REIL Rwy 6	
MIRL Rwy 6-24 and 1L-19R	

4 NM Holding Pattern		FESAV	5000	CIVDA	tr 326°	POPES
5000 ← 186°		006° →	1800	*1.7 NM to RWY1L	*LNAV only	
GP 3.00° TCH 50		1800	1800	RWY1L		
		6 NM	3.8 NM	1.7 NM		
CATEGORY	A	B	C	D		
LPV DA	217-¾		200 (200-¾)			
LNAV/VNAV DA	330-¾		313 (300-¾)			
LNAV MDA	560-¾ 543 (600-¾)		560-1⅜ 543 (600-1⅜)			

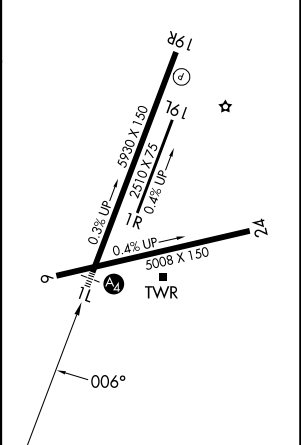

SW-2, 25 DEC 2025 to 22 JAN 2026

SW-2, 25 DEC 2025 to 22 JAN 2026