

WAAS CH 93535 W30A	APP CRS 296°	Rwy Ldg 10000 TDZE 9 Apt Elev 9
--	------------------------	--

RNAV (GPS) Y RWY 30
OAKLAND SAN FRANCISCO BAY (OAK)

RNP APCH - GPS.

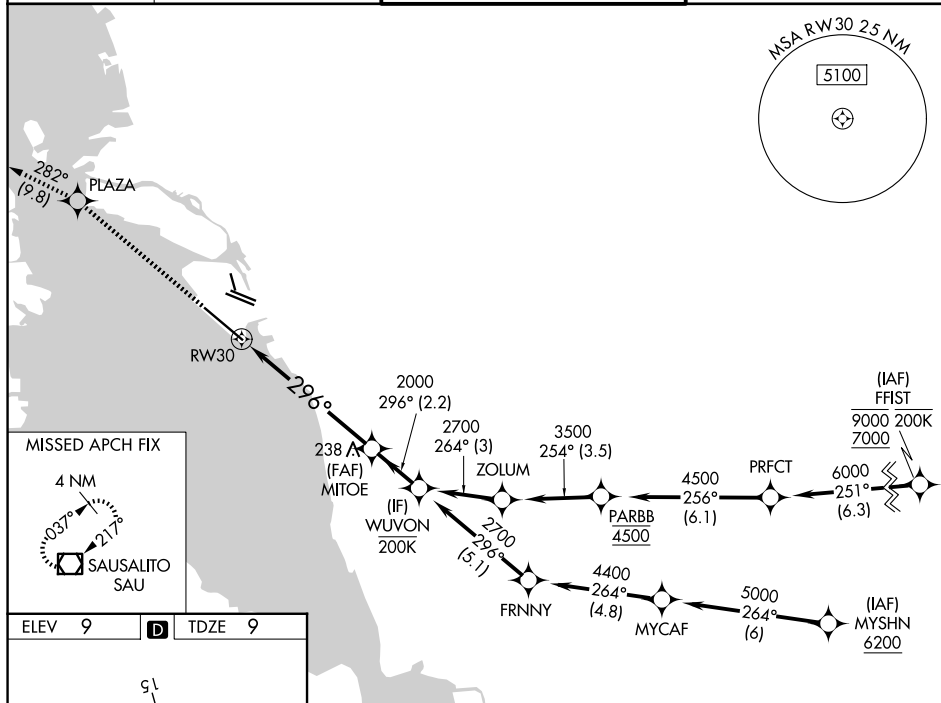
T For uncompensated Baro-VNAV systems, LNAV/VNAV NA
A below 2°C or above 54°C. For inop ALS, increase LNAV/VNAV
Cats A/B/C visibility to RVR 4000, Cat D visibility to RVR 4500,
and LNAV Cats C/D visibility to 1 $\frac{3}{8}$ SM.

ALSF-2



MISSED APPROACH: Climb to 4000 direct PLAZA and on track 282° to SAU VOR/DME and hold, continue climb-in-hold to 4000.

D-ATIS 133.775	NORCAL APP CON 125.35 263.15	OAKLAND TOWER 118.3 291.65 (10L/R-28L/R, 15-33) 127.2 256.9 (12-30)	GND CON 121.9 (10L/R-28L/R, 15-33) 121.75 (12-30)
--------------------------	--	---	---

[illegible]